

Right Choice for Better Value



www.atftyre.com

About us

Asian Tire Factory Limited (ATF TIRES) incepted in 1993, is India's leading manufacturers of extensive range of Off-Highway Tires at its State-of-the-Art manufacturing facility located at Jalandhar (Punjab), an Industrial city in North India.

The Company is accredited with ISO 9001:2015 quality system, has its own R&D centre where continues efforts are undertaken to improve product quality and manufacturing system. Unrelenting business standards adopted by the management, right from raw material stage till the final inspection, stringent & rigorous checks are conducted by qualified engineers. Also, constant modernization & upgradation is brought about in machinery which helps better consistency & increase production capacity, to offer maximum value to our customers spread across over 80 countries all over the globe.

Achievements:

- Granted "Star Export House" recognition by Government of India.
- Awarded "Special Export Award" by Ministry of Commerce & Industry for outstanding export performance in 2010-11 & 2011 -12.
- Regular winner of CAPEXIL's Export Merit Awards for its excellence in export business.





3745

3880

3160



4105

4501

4411

4222



3934

4483

4447

4762

4465



7255

7525

6040

6067

4600

1324

2350



2368

5131

5014

5455

5554

5491

2260



1387

7228

7336

7129

7210

7444

7237

Cont

Agriculture Tires

Tractor Rear R1 - Drive Wheel	8
Tractor Rear R1 - Heavy Duty	10
Tractor Rear R1 - Drive Wheel/Row Crop	12
Tractor Rear - R1/G1(I3) Tractor Front & Implement	14
Irrigation	16
Tractor Rear R2 & AS	20
Tractor Front - F2	22
Tractor front - Notched Rib	24
Tractor Front - F2M	26
Implement - AW Farm	28
Implement - I-1	30
Implement - Farm Highway Services	32
Floatation	34
Trailer / Trolley	36



ents

Industrial Tires

Industrial Tractor Multi Purpose Tires (MPT)	40
Industrial Tractor F3 & R4	42
Grader/Loader G2/L2	44
Skid Steers L2/R4	48
Skid Steers L4/L5	50
Industrial Forklift	52
Earthmover/Loader E3/L3	54
Compactor R3	56
OTR NHS Truck - Semi Lug & Rib	58

Commercial Tires

Military & LCV Light Commercial Vehicle	60
---	----



Agriculture Tires

We design specialized tires to satisfy our customers in every aspect of tire's performance







R-1 Tractor Rear/ Drive Wheel

FEATURES

- Deep tread designed for superior grip in muddy soil.
- A High quality raw material & strong nylon casting provides excellent stability and guards against mechanical failures.



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
24"	R1	12.4-24	1360	6	TT/TL	W 11	1165	45.9	315	12.4	3410	539	26	33	17	1090	2400	40	25	111 A8	1.70	24
24"	R1	12.4-24	1360	8	TT/TL	W 11	1165	45.9	315	12.4	3410	539	26	33	17	1285	2830	40	25	117 A8	2.20	32
24"	R1	12.4-24	1360	12	TT/TL	W 11	1165	45.9	315	12.4	3410	539	26	33	17	1600	3520	40	25	124 A8	3.30	48
24"	R1	13.6-24	1360	8	TT/TL	W 12	1210	47.6	355	14.0	3657	562	26	33	17	1400	3080	40	25	120 A8	1.90	28
24"	R1	13.6-24	1360	12	TT/TL	W 12	1210	47.6	355	14.0	3657	562	26	33	17	1500	3300	40	25	122 A8	2.20	32
24"	R1	14.9-24	1360	6	TT/TL	W 13	1265	49.8	375	14.8	3719	583	26	33	17	1360	3000	40	25	119 A8	1.40	20
24"	R1	14.9-24	1360	8	TT/TL	W 13	1265	49.8	375	14.8	3719	583	26	33	17	1600	3520	40	25	124 A8	1.80	26
24"	R1	14.9-24	1360	12	TT/TL	W 13	1265	49.8	375	14.8	3719	583	26	33	17	2000	4400	40	25	132 A8	2.60	38
24"	R1	16.9-24	1360	8	TT/TL	W 15L	1335	52.6	429	16.9	3950	615	26	33	17	1850	4080	40	25	129 A8	1.70	24
24"	R1	16.9-24	1360	12	TT/TL	W 15L	1335	52.6	429	16.9	3950	615	26	33	17	2060	4540	40	25	133 A8	2.20	32
26"	R1	14.9-26	1360	8	TT/TL	W 13	1315	51.8	375	14.8	3863	608	26	33	20	1650	3640	40	25	125 A8	1.80	26
26"	R1	14.9-26	1360	12	TT/TL	W 13	1315	51.8	375	14.8	3863	608	26	33	20	2000	4410	40	25	132 A8	2.50	36
26"	R1	16.9-26	1360	12	TT/TL	W15	1384	54.5	429	16.8	4183	625	26	33	20	2060	4540	40	25	133 A8	1.90	28
26"	R1	18.4-26	1360	8	TT/TL	W 16L	1475	58.1	467	18.4	4250	650	33	42	21	2060	4540	40	25	133 A8	1.40	20
26"	R1	18.4-26	1360	12	TT/TL	W 16L	1475	58.1	467	18.4	4250	650	33	42	21	2650	5840	40	25	142 A8	2.20	32
26"	R1	23.1-26	1360	12	TT/TL	DW 20 AB	1585	62.4	587	23.1	4615	700	34	43	21	3250	7150	40	25	149 A8	1.70	24
26"	R1	23.1-26	1360	14	TT/TL	DW 20 AB	1585	62.4	587	23.1	4615	700	34	43	21	3550	7850	40	25	152 A8	1.90	28
26"	R1	23.1-26	1360	16	TT/TL	DW 20 AB	1585	62.4	587	23.1	4615	700	34	43	21	3875	8540	40	25	155 A8	2.20	32
28"	R1	11.2-28	1360	6	TT/TL	W 10	1205	47.4	280	11.0	3540	565	26	33	19	1000	2200	40	25	108 A8	1.80	26
28"	R1	11.2-28	1360	8	TT/TL	W 10	1205	47.4	280	11.0	3540	565	26	33	19	1120	2470	40	25	112 A8	2.10	30
28"	R1	11.2-28	1360	12	TT/TL	W 10	1205	47.4	280	11.0	3540	565	26	33	19	1200	2640	40	25	115 A8	2.30	34
28"	R1	12.4-28	1360	8	TT/TL	W 11	1260	49.6	320	12.6	3704	889	26	33	20	1400	3090	40	25	120 A8	2.20	32
28"	R1	12.4-28	1360	12	TT/TL	W 11	1260	49.6	320	12.6	3704	889	26	33	20	1450	3200	40	25	121 A8	2.40	35
28"	R1	13.6-28	1360	8	TT/TL	W 12	1310	51.6	345	13.6	3851	610	26	33	20	1500	3300	40	25	122 A8	1.90	28
28"	R1	13.6-28	1360	12	TT/TL	W 12	1310	51.6	345	13.6	3851	610	26	33	20	1900	4180	40	25	130 A8	2.90	42
28"	R1	14.9-28	1360	8	TT/TL	W 13	1361	53.6	375	14.8	4013	634	26	33	20	1700	3740	40	25	126 A8	1.80	26
28"	R1	14.9-28	1360	12	TT/TL	W 13	1361	53.6	375	14.8	4013	634	26	33	20	2060	4540	40	25	133 A8	2.60	38

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
28"	R1	16.9-28	1360	8	TT/TL	W 15L	1420	55.9	430	16.9	4310	655	33	42	21	1950	4300	40	25	131 A8	1.65	24
28"	R1	16.9-28	1360	10	TT/TL	W 15L	1420	55.9	430	16.9	4310	655	33	42	21	2120	4680	40	25	134 A8	1.90	28
28"	R1	16.9-28	1360	12	TT/TL	W 15L	1420	55.9	430	16.9	4310	655	33	42	21	2240	4930	40	25	136 A8	2.10	30
28"	R1	16.9-28	1360	14	TT/TL	W 15L	1420	55.9	430	16.9	4310	655	33	42	21	2300	5070	40	25	137 A8	2.30	33
30"	R1	14.9-30	1360	8	TT/TL	W 11, W 12	1415	55.7	378	14.9	4316	659	33	42	21	1750	3860	40	25	127 A8	1.80	26
30"	R1	14.9-30	1360	12	TT/TL	W 11, W 12	1415	55.7	378	14.9	4316	659	33	42	21	2100	4630	40	25	134 A8	2.50	36
30"	R1	16.9-30	1360	8	TT/TL	W 15L	1485	58.5	430	16.9	4366	688	33	42	21	2000	4400	40	25	132 A8	1.65	24
30"	R1	16.9-30	1360	10	TT/TL	W 15L	1485	58.5	430	16.9	4366	688	33	42	21	2240	4940	40	25	136 A8	1.90	28
30"	R1	16.9-30	1360	12	TT/TL	W 15L	1485	58.5	430	16.9	4366	688	33	42	21	2500	5520	40	25	140 A8	2.30	34
30"	R1	16.9-30	1360	14	TT/TL	W 15L	1485	58.5	430	16.9	4366	688	33	42	21	2725	6000	40	25	143 A8	2.80	40
30"	R1	18.4-30	1360	8	TT/TL	W 16L	1545	60.8	460	18.1	4542	714	33	42	20	2180	4800	40	25	135 A8	1.40	20
30"	R1	18.4-30	1360	10	TT/TL	W 16L	1545	60.8	460	18.1	4542	714	33	42	20	2500	5520	40	25	140 A8	1.80	26
30"	R1	18.4-30	1360	12	TT/TL	W 16L	1545	60.8	460	18.1	4542	714	33	42	20	2900	6400	40	25	145 A8	2.20	32
30"	R1	18.4-30	1360	14	TT/TL	W 16L	1545	60.8	460	18.1	4542	714	33	42	20	3250	7160	40	25	149 A8	2.50	36
34"	R1	16.9-34	1360	8	TT/TL	W 15L	1585	62.4	429	16.9	4838	736	27	34	22	2120	4680	40	25	134 A8	1.65	24
34"	R1	16.9-34	1360	10	TT/TL	W 15L	1585	62.4	429	16.9	4838	736	27	34	22	2360	5200	40	25	138 A8	1.90	28
34"	R1	16.9-34	1360	12	TT/TL	W 15L	1585	62.4	429	16.9	4838	736	27	34	22	2500	5510	40	25	140 A8	2.20	32
34"	R1	16.9-34	1360	14	TT/TL	W 15L	1585	62.4	429	16.9	4838	736	27	34	22	2575	5675	40	25	141 A8	2.30	34
34"	R1	18.4-34	1360	8	TT/TL	W 16L	1650	65.0	465	18.3	4851	766	33	42	24	2300	5080	40	25	137 A8	1.40	20
34"	R1	18.4-34	1360	10	TT/TL	W 16L	1650	65.0	465	18.3	4851	766	33	42	24	2725	6000	40	25	143 A8	1.80	26
34"	R1	18.4-34	1360	12	TT/TL	W 16L	1650	65.0	465	18.3	4851	766	33	42	24	3000	6600	40	25	146 A8	2.20	32
34"	R1	18.4-34	1360	14	TT/TL	W 16L	1650	65.0	465	18.3	4851	766	33	42	24	3250	7160	40	25	149 A8	2.60	38
34"	R1	20.8-34	1360	12	TT/TL	W 18L	1732	68.2	528	20.8	5109	797	33	42	26	3250	7160	40	25	149 A8	1.80	26
34"	R1	20.8-34	1360	14	TT/TL	W 18L	1732	68.2	528	20.8	5109	797	33	42	26	3450	7600	40	25	151 A8	2.10	30
34"	R1	20.8-34	1360	16	TT/TL	W 18L	1732	68.2	528	20.8	5109	797	33	42	26	3650	8050	40	25	153 A8	2.30	34
38"	R1	13.6-8/ 14.00-38	1360	8	TT/TL	W 12	1565	61.6	345	13.6	4661	738	26	33	24	1700	3740	40	25	126 A8	1.90	28
38"	R1	13.6-8/ 14.00-38	1360	10	TT/TL	W 12	1565	61.6	345	13.6	4661	738	26	33	24	1900	4180	40	25	130 A8	2.35	34
38"	R1	13.6-8/ 14.00-38	1360	12	TT/TL	W 12	1565	61.6	345	13.6	4661	738	26	33	24	2180	4800	40	25	135 A8	2.90	42
38"	R1	15.5-38	1360	10	TT/TL	W 14L	1585	62.4	395	15.6	4660	746	27	34	22	2060	4540	40	25	133 A8	2.20	32
38"	R1	15.5-38	1360	12	TT/TL	W 14L	1585	62.4	395	15.6	4660	746	27	34	22	2240	4940	40	25	136 A8	2.60	38
38"	R1	15.5-38	1360	14	TT/TL	W 14L	1585	62.4	395	15.6	4660	746	27	34	22	2430	5360	40	25	139 A8	3.00	44
38"	R1	16.9-38	1360	8	TT/TL	W 15L	1685	66.3	429	16.9	4954	788	33	42	24	2240	4940	40	25	136 A8	1.65	24

Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
38"	R1	16.9-38	1360	10	TT/TL	W 15L	1685	66.3	429	16.9	4954	788	33	42	24	2360	5200	40	25	138 A8	2.00	29
38"	R1	16.9-38	1360	12	TT/TL	W 15L	1685	66.3	429	16.9	4954	788	33	42	24	2575	5680	40	25	141 A8	2.30	33
38"	R1	16.9-38	1360	14	TT/TL	W 15L	1685	66.3	429	16.9	4954	788	33	42	24	2725	6000	40	25	143 A8	2.60	38
38"	R1	18.4-38	1360	8	TT/TL	W 16L	1750	68.9	465	18.3	5145	815	33	42	26	2430	5360	40	25	139 A8	1.40	20
38"	R1	18.4-38	1360	10	TT/TL	W 16L	1750	68.9	465	18.3	5145	815	33	42	26	2900	6400	40	25	145 A8	1.80	26
38"	R1	18.4-38	1360	12	TT/TL	W 16L	1750	68.9	465	18.3	5145	815	33	42	26	3250	7150	40	25	149 A8	2.20	32
38"	R1	18.4-38	1360	14	TT/TL	W 16L	1750	68.9	465	18.3	5145	815	33	42	26	3450	7600	40	25	151 A8	2.50	36
38"	R1	18.4-38	1360	16	TT/TL	W 16L	1750	68.9	465	18.3	5145	815	33	42	26	3550	7820	40	25	152 A8	2.80	40
38"	R1	20.8-38	1360	12	TT/TL	W 18L	1835	72.2	530	20.9	5395	852	33	42	23	3550	7850	40	25	152 A8	1.90	28
38"	R1	20.8-38	1360	14	TT/TL	W 18L	1835	72.2	530	20.9	5395	852	33	42	23	3875	8550	40	25	155 A8	2.20	32
38"	R1	20.8-38	1360	16	TT/TL	W 18L	1835	72.2	530	20.9	5395	852	33	42	23	4125	9090	40	25	157 A8	2.50	36
42"	R1	18.4-42	1360	14	TT/TL	W16	1857	73.1	487	19.2	5460	864	33	42	23	3650	8050	40	25	153 A8	2.50	36

DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



R-1 Tractor Rear/ Drive Wheel

FEATURES

- Deep tread designed for superior grip in muddy soil.
- A High quality raw material & strong nylon casting provides excellent stability and guards against mechanical failures.



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	Mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
20"	R1	9.5-20	1900	6	TT/TL	W 8	950	37.4	235	9.25	2942	449	22	28		825	1820	30	19	101 A6	2.10	30
20"	R1	11.2-20	1900	8	TT/TL	W 10	1020	40.2	290	11.4	3000	476	22	28	17	1090	2400	30	19	111 A6	2.40	35
22"	R1	8.3-22	1900	8	TT/TL	W 7	945	37.2	205	8.0	2778	444	23	29		900	1980	30	19	104 A6	3.20	46
22"	R1	9.5-22	1900	8	TT/TL	W 8	1005	39.6	235	9.3	2955	469	23	29	18	1060	2340	30	19	110 A6	2.90	42
24"	R1	8.3-24	1900	6	TT/TL	W 7	995	39.2	210	8.3	2925	469	23	29	18	825	1820	30	19	101 A6	2.40	35
24"	R1	8.3-24	1900	8	TT/TL	W 7	995	39.2	210	8.3	2925	469	23	29	18	925	2040	30	19	105 A6	3.10	45
24"	R1	9.5-24	1900	6	TT/TL	W 8	1055	41.5	230	9.1	3105	495	23	29	18	950	2090	30	19	106 A6	2.10	30
24"	R1	9.5-24	1900	8	TT/TL	W 8	1055	41.5	230	9.1	3105	495	23	29	18	1120	2470	30	19	112 A6	2.80	41
24"	R1	11.2-24	1900	8	TT/TL	W 10	1090	42.9	280	11.0	3205	509	25	32	18	1250	2760	30	19	116 A6	2.40	35
24"	R1	11.2-24	1900	12	TT/TL	W 10	1090	42.9	280	11.0	3205	509	25	32	18	1550	3420	30	19	123 A6	3.6	52
28"	R1	8.3-28	1900	8	TT/TL	W 7	1104	43.4	213	8.4	3246	523	25	32	18	1000	2200	30	19	109 A6	3.20	46
30"	R1	7.2-30	1900	6	TT/TL	W 6	1095	43.1	185	7.3	3219	523	25	32		690	1520	30	19	95 A6	2.30	33
32"	R1	8.3-32	1900	8	TT/TL	W 7	1195	47.0	211	8.3	3585	572	26	33	24	1090	2400	30	19	111 A6	3.20	46
32"	R1	9.5-32	1900	8	TT/TL	W 8	1255	49.4	235	9.3	3686	594	26	33	24	1060	2340	30	19	110 A6	2.10	30
32"	R1	12.4-32	1900	8	TT/TL	W 11	1360	53.5	320	12.6	3998	636	28	35	21	1650	3640	30	19	125 A6	2.20	32
32"	R1	12.4-32	1900	10	TT/TL	W 11	1360	53.5	320	12.6	3998	636	28	35	21	1800	3970	30	19	128 A6	2.80	41
36"	R1	7/7.2-36	1900	8	TT/TL	6.0	1255	49.4	183	7.2	3702	577	26	33	24	1000	2205	30	19	108 A6	3.70	54
36"	R1	9.5-36	1900	8	TT/TL	W 8	1360	53.5	235	9.3	4000	646	26	33	21	1250	2760	30	19	116 A6	2.76	40
36"	R1	9.5-36	1900	10	TT/TL	W 8	1360	53.5	235	9.3	4000	646	26	33	21	1500	3310	30	19	122 A6	3.50	51
36"	R1	12.4-36	1900	8	TT/TL	W 11	1465	57.7	320	12.6	4307	691	26	33	23	1750	3860	30	19	127 A6	2.30	33
36"	R1	12.4-36	1900	12	TT/TL	W 11	1465	57.7	320	12.6	4307	691	26	33	23	2180	4810	30	19	135 A6	3.50	51
36"	R1	13.6-36	1900	8	TT/TL	W 12	1515	59.6	345	13.6	4454	713	26	33	23	1950	4300	30	19	131 A6	2.10	30
36"	R1	13.6-36	1900	10	TT/TL	W 12	1515	59.6	345	13.6	4454	713	26	33	23	2120	4670	30	19	134 A6	2.50	36
36"	R1	13.6-36	1900	12	TT/TL	W 12	1515	59.6	345	13.6	4454	713	26	33	23	2300	5070	30	19	137 A6	2.90	42
38"	R1	11.2-38	1900	6	TT/TL	W 10	1445	56.9	284	11.2	4400	675	26	33	22	1285	2830	30	19	117 A6	1.80	26
38"	R1	11.2-38	1900	8	TT/TL	W 10	1445	56.9	284	11.2	4400	675	26	33	22	1500	3310	30	19	122 A6	2.30	33
38"	R1	12.4-38	1900	8	TT/TL	W 11	1525	60.0	315	12.4	4670	718	26	33	22	1750	3860	30	19	127 A6	2.30	33
38"	R1	12.4-38	1900	12	TT/TL	W 11	1525	60.0	315	12.4	4670	718	26	33	22	2120	4670	30	19	134 A6	3.30	48
38"	R1	12.4-38	1900	14	TT/TL	W 11	1525	60.0	315	12.4	4670	718	26	33	22	2360	5200	30	19	138 A6	3.70	54

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



R-1 Tractor Rear/ Drive Wheel

FEATURES

- Medium and small tractor application.
- Specially designed deep lugs provides high traction, self cleaning properties and long service life.
- Strong nylon casting provide extra stability.





Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	Mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
8"	R1	4.00-8	1630	4	TT/TL	3.0	418	16.5	114	4.5	1220	185	14	18	15	272	600	30	19	63 A6	3.30	48
10"	R1	4.00-10	1630	4	TT/TL	3.0	466	18.3	110	4.3	1364	217	10	13	12	290	640	30	19	65 A6	2.75	40
10"	R1	5.00-10	1630	4	TT/TL	3.0	512	20.1	140	5.5	1508	235	10	13	12	305	670	30	19	67 A6	2.25	33
12"	R1	4.00-12	1630	4	TT/TL	3.0 D	525	20.7	120	4.7	1546	241				210	460	30	19	54 A6	1.50	22
12"	R1	5.00-12	1630	4	TT/TL	3.0	580	22.8	130	5.1	1731	271	20	25	12	218	480	30	19	55 A6	2.40	35
12"	R1	5.00-12	1630	6	TT/TL	3.0	580	22.8	130	5.1	1731	271	20	25	12	307	580	30	19	67 A6	2.80	41
12"	R1	5.00-12	1630L	4	TT/TL	3.0	580	22.8	130	5.1	1731	271	20	25	12	218	480	30	19	55 A6	2.40	35
12"	R1	5.00-12	1630L	6	TT/TL	3.0	580	22.8	130	5.1	1731	271	20	25	12	307	580	30	19	67 A6	2.80	41
12	R1	6-12	1630	4	TT/TL	4.5	585	23.0	153	6.0	1735	276	16	20		272	600	30	19	63 A6	1.90	28
12	R1	6-12	1630	6	TT/TL	4.5	585	23.0	153	6.0	1735	276	16	20		355	760	30	19	71 A6	2.50	36
12"	R1	6.00-12	1630	6	TT/TL	4.0	630	24.8	160	6.3	1901	293	21	27	13	400	882	30	19	76 A6	2.60	38
12"	R1	6.00-12	1630	8	TT/TL	4.0	630	24.8	160	6.3	1901	293	21	27	13	487	1070	30	19	83 A6	4.00	58
12"	R1	6.00-12	1630L	6	TT/TL	4.0	630	24.8	160	6.3	1901	293	21	27	13	400	882	30	19	76 A6	2.60	38
12"	R1	6.00-12	1630L	8	TT/TL	4.0	630	24.8	160	6.3	1901	293	21	27	13	487	1070	30	19	83 A6	4.00	58
12"	R1	6.5/80-12	L1630	6	TT/TL	5.0	569	22.4	162	6.4	1685	260	21	27	13	730	1610	30	19	96 A6	3.60	52
12"	R1	7-12	1630	6	TT/TL	6.0	687	27.0	200	7.9	2007	305				487	1070	30	19	83 A6	2.50	36
13"	R1	6.5/80-13	1630	6	TT/TL	5.0	642	25.3	171	6.7	1765	280	21	27	13	770	1700	30	19	99 A6	3.60	52
14"	G1/R1	6-14	1630	4	TT/TL	5.0 JA, 5.0 KB	655	25.8	157	6.2	1965	305	19	24	19	300	660	30	19	66 A6	1.90	28
14"	G1/R1	7-14	1630	6	TT/TL	6.0	691	27.2	183	7.2	2057	330	19	24		450	990	30	19	80 A6	2.50	36
15"	G1/R1	5.00-15	1630	6	TT/TL	4.0	657	25.8	145	5.7	1956	305	15	19		387	850	30	19	75 A6	3.60	51
15"	G1/R1	5.90-15	1630	6	TT/TL	4.5	663	26.1	160	6.3	1976	310	19	24		825	1820	30	19	101 A6	2.10	30
15"	G1/R1	6.50/80-15	1630	4	TT/TL	5.0	663	26.1	163	6.4	1976	310	15	19		670	1480	30	19	94 A6	2.40	35
15"	G1/R1	6.50/80-15	1630	6	TT/TL	5.0	663	26.1	163	6.4	1976	310	15	19		840	1850	30	19	101 A6	3.60	52
15"	G1/R1	690x180-15	1630	6	TT/TL	5.0	690	27.2	176	6.9	2055	322	15	19		810	1790	30	19	101 A6	2.30	36
15"	G1/R1	7.00-15	1630	8	TT/TL	5.5	715	28.1	183	7.2	2126	331	20	25		1050	2310	30	19	110 A6	3.60	52
15"	G1/R1	7.5L-15	1630	8	TT/TL	6.0	795	31.2	210	8.2	2286	356	20	25		825	1820	30	19	101 A6	3.70	54
15"	G1/R1	7.50-15	1630	8	TT/TL	6.0	770	30.3	208	8.1	2308	359	20	25		1285	2830	30	19	117 A6	5.00	72
15"	G1/R1	8.0/75-15	1630	6	TT/TL	6.5	708	27.9	199	7.8	2093	326				800	1760	30	19	100 A6	2.50	36
16"	R1	4.00-16	1630	4	TT/TL	3.0	628	24.7	110	4.3	1835	307	11	14	22	475	1050	30	19	82 A6	2.80	41
16"	G1/R1	4.50-16	1630	6	TT/TL	3.0	655	25.8	122	4.8	1952	311	9	11		365	800	30	19	73 A6	3.20	47
16"	R1	6.00-16	1630	6	TT/TL	5.0	735	28.9	165	6.5	2100	330	19	24	20	560	1230	30	19	88 A6	3.40	49
16"	R1	6.00-16	1630	8	TT/TL	5.0	735	28.9	165	6.5	2100	330	19	24	20	670	1480	30	19	94 A6	4.50	65
16"	G1/R1	6.50-16	1630	6	TT/TL	4.5	765	30.1	180	7.0	2184	330	16	20		870	1920	30	19	103 A6	2.75	40
16"	G1/R1	6.50-16	1630	8	TT/TL	4.5	765	30.1	180	7.0	2184	330	16	20		1035	2280	30	19	109 A6	3.75	54

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



R-1 Tractor Rear/ Drive Wheel

FEATURES

- Medium and small tractor application.
- Specially designed deep lugs provides high traction, self cleaning properties and long service life.
- Strong nylon casting provide extra stability.





Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	Mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
16"	G1/R1	7-16	1630	6	TT/TL	6.0	742	29.2	183	7.2	2196	341	22	28	18	500	1100	30	19	84 A6	2.50	36
16"	G1/R1	7-16	1630	8	TT/TL	6.0	742	29.2	183	7.2	2196	341	22	28	18	615	1360	30	19	91 A6	3.30	48
16"	R1	7.50-16	1630	8	TT/TL	5.5 F	800	31.5	205	8.1	2368	367	25	32	18	875	1930	30	19	103 A6	3.70	54
16"	R1	7.50-16	1630	10	TT/TL	5.5 F	800	31.5	205	8.1	2368	367	25	32	18	975	2150	30	19	107 A6	4.60	67
16"	G1/R1	8-16	1630	6	TT/TL	6.0	785	30.9	200	7.9	2360	366	26	33	14	615	1360	30	19	91 A6	1.90	28
16"	G1/R1	8-16	1630	8	TT/TL	6.0	785	30.9	200	7.9	2360	366	26	33	14	750	1650	30	19	98 A6	2.60	38
16"	G1/R1	8.25-16	1630	6	TT/TL	7.0	848	33.3	229	9.0	2540	354	21	26		1180	2600	30	19	114 A6	2.30	33
16"	G1/R1	8.25-16	1630	8	TT/TL	7.0	848	33.3	229	9.0	2540	354	21	26		1400	3090	30	19	120 A6	3.10	45
16"	G1/R1	9.5-16	1630	6	TT/TL	W 8L	840	33.1	235	9.3	2502	384	26	33	16	710	1560	30	19	96 A6	2.10	30
16"	G1/R1	9.5-16	1630	8	TT/TL	W 8L	840	33.1	235	9.3	2502	384	26	33	16	850	1870	30	19	102 A6	2.80	41
16"	G1/R1	9.5-16	1630	12	TT/TL	W 8L	840	33.1	235	9.3	2502	384	26	33	16	1120	2470	30	19	112 A6	4.00	58
16	G1/R1	9.0/75-16	1630	10	TT/TL	8.0	774	30.5	229	9.0	2330	355				1390	3060	30	19	120 A6	4.40	64
16"	G1/R1	250/80-16	1630	10	TT/TL	8.0	816	32.1	240	9.4	2412	369	23	29		1285	2830	30	19	117 A6	2.80	41
18"	G1/R1	7.50-18	1630	8	TT/TL	6.0	854	33.6	214	8.4	2540	406				950	2090	30	19	106 A6	3.70	54
18"	G1/R1	7.50-18	1630	10	TT/TL	6.0	854	33.6	214	8.4	2540	406				1150	2530	30	19	113 A6	4.75	69
18"	G1/R1	250/80-18	1630	10	TT/TL	8.0	857	33.7	251	9.9	2667	406				1360	3000	30	19	119 A6	2.80	41
18"	G1/R1	8-18	1630	6	TT/TL	W 7	845	33.3	190	7.5	2515	390	26	33	16	670	1480	30	19	94 A6	1.90	28
18"	G1/R1	8-18	1630	8	TT/TL	W 7	845	33.3	190	7.5	2515	390	26	33	16	800	1760	30	19	100 A6	2.60	38
19"	R1	4.50-19	1630	6	TT/TL	3.0D	736	29.0	120	4.7	2171	339	14	18	24	487	1074	30	19	83 A6	4.40	64
19"	R1	4.50-19	1630	8	TT/TL	3.0D	736	29.0	120	4.7	2171	339	14	18	24	515	1130	30	19	85 A6	5.00	72
20"	R1	7.50-20	1630	8	TT/TL	5.5F	904	35.6	209	8.2	2695	422	22	28	20	980	2160	30	19	107 A6	3.20	46
20"	R1	7.50-20	1630	10	TT/TL	5.5F	904	35.6	209	8.2	2695	422	22	28	20	1090	2400	30	19	111 A6	4.00	58
20"	R1	8.3-20	1630	6	TT/TL	W 7	895	35.2	200	7.9	2608	419	22	28	20	710	1565	30	19	96 A6	2.10	30
20"	R1	8.3-20	1630	8	TT/TL	W 7	895	35.2	200	7.9	2608	419	22	28	20	825	1810	30	19	101 A6	2.50	36

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



R-1 Heavy Duty (suitable for Haulage & Industrial)

FEATURES

- Specially designed deep lugs provides high traction, self cleaning properties and long service life.
- A High quality raw material & strong nylon casting provides excellent stability and guards against meehanical failures.
- Wide and long lugs helps in comfortable drive.



1675



1540



1990



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
18"	R1 HD	8.00-18	1990	8	TT/TL	W 7	845	33.3	190	7.5	2515	390	30	38	17	750	1650	30	19	98 A6	2.10	30
24"	R1 HD	9.5-24	1990	8	TT/TL	W 8	1060	41.7	245	9.6	3137	495	36	46	20	1120	2470	30	19	112 A6	2.80	41
24"	R1 HD	9.5-24	1990	10	TT/TL	W 8	1060	41.7	245	9.6	3137	495	36	46	20	1250	2760	30	19	116 A6	3.50	51
24"	R1 HD	9.5-24	1990	12	TT/TL	W 8	1060	41.7	245	9.6	3137	495	36	46	20	1360	3000	30	19	119 A6	4.10	59
24"	R1 HD	12.4-24	1990	12	TT/TL	W11	1170	46.0	315	12.4	3573	543	36	46		1800	3970	30	19	128 A6	3.50	51
26"	R1 HD	14.9-26	1990	12	TT/TL	W 12	1316	51.8	378	14.9	3895	605	40	51	20	2240	4940	30	19	136 A6	2.70	39
26"	R1 HD	14.9-26	1990	14	TT/TL	W 12	1316	51.8	378	14.9	3895	605	40	51	20	2430	5360	30	19	139 A6	3.10	45
26"	R1 HD	18.4-26	1990	12	TT/TL	W 16L	1475	58.1	467	18.4	4250	650	42	53	20	3000	6610	30	19	146 A6	2.30	33
26"	R1 HD	18.4-26	1990	14	TT/TL	W 16L	1475	58.1	467	18.4	4250	650	42	53	20	3250	7160	30	19	149 A6	2.60	38
28"	R1	12.4-28	1675/1540	12	TT/TL	W 11	1270	50.0	318	12.5	3805	589	35	44	20	1650	3640	30	19	125 A6	2.50	36
28"	R1	12.4-28	1675/1540	14	TT/TL	W 11	1270	50.0	318	12.5	3805	589	35	44	20	1700	3750	30	19	126 A6	2.60	38
28"	R1 HD	12.4-28	1990	12	TT/TL	W 11	1270	50.0	318	12.5	3805	589	38	48	20	1650	3640	30	19	125 A6	2.50	36
28"	R1 HD	12.4-28	1990	14	TT/TL	W 11	1270	50.0	318	12.5	3805	589	38	48	20	1700	3750	30	19	126 A6	2.60	38
28"	R1	13.6-28	1675	8	TT/TL	W 12	1330	52.4	340	13.4	3940	615	35	44	20	1650	3640	30	19	125 A6	2.00	29
28"	R1	13.6-28	1675	12	TT/TL	W 12	1330	52.4	340	13.4	3940	615	35	44	20	1800	3970	30	19	128 A6	2.30	33
28"	R1	13.6-28	1540	12	TT/TL	W 12	1330	52.4	340	13.4	3940	615	35	44	20	1800	3970	30	19	128 A6	2.30	33
28"	R1 HD	13.6-28	1990	12	TT/TL	W 12	1320	52.0	350	13.8	3910	610	40	51	20	1800	3970	30	19	128 A6	2.30	33
28"	R1 HD	14.9-28	1990	12	TT/TL	W 13	1370	53.9	380	15.0	4055	630	40	51	20	2120	4670	30	19	134 A6	2.30	33
28"	R1 HD	14.9-28	1990	14	TT/TL	W 13	1370	53.9	380	15.0	4055	630	40	51	20	2575	5680	30	19	141 A6	3.00	44
28"	R1 HD	16.9-28	1990	12	TT/TL	W 15L	1435	56.5	430	16.9	4250	660	42	53	20	2725	6010	30	19	143 A6	2.40	35
28"	R1 HD	16.9-28	1990	14	TT/TL	W 15L	1435	56.5	430	16.9	4250	660	42	53	20	3100	6830	30	19	147 A6	2.80	41
30"	R1 HD	16.9-30	1990	12	TT/TL	W 15L	1485	58.5	429	16.9	4366	685	43	54	20	2800	6170	30	19	144 A6	2.40	35
30"	R1 HD	16.9-30	1990	14	TT/TL	W 15L	1485	58.5	429	16.9	4366	685	43	54	20	3000	6610	30	19	146 A6	2.80	41
30"	R1 HD	16.9-30	1990	16	TT/TL	W 15L	1485	58.5	429	16.9	4366	685	43	54	20	3250	7160	30	19	149 A6	3.20	46
30"	R1 HD	18.4-30	1990	12	TT/TL	W 16L	1565	61.6	465	18.3	4632	720	44	56	21	3250	7170	30	19	149 A6	2.30	33
30"	R1 HD	18.4-30	1990	14	TT/TL	W 16L	1565	61.6	465	18.3	4632	720	44	56	21	3450	7610	30	19	151 A6	2.60	38
30"	R1 HD	18.4-30	1990	16	TT/TL	W 16L	1565	61.6	465	18.3	4632	720	44	56	21	3650	8050	30	19	153 A6	2.90	42
34"	R1 HD	16.9-34	1990	10	TT/TL	W 15L	1585	62.4	429	16.9	4838	736				2650	5840	30	19	142 A6	2.00	29
34"	R1 HD	16.9-34	1990	12	TT/TL	W 15L	1585	62.4	429	16.9	4838	736				2800	6170	30	19	144 A6	2.30	33
34"	R1 HD	16.9-34	1990	14	TT/TL	W 15L	1585	62.4	429	16.9	4838	736				3000	6610	30	19	146 A6	2.50	36
34"	R1 HD	18.4-34	1990	10	TT/TL	W 16L	1650	65.0	467	18.4	4866	768				3000	6610	30	19	146 A6	1.80	26
34"	R1 HD	18.4-34	1990	14	TT/TL	W 16L	1650	65.0	467	18.4	4866	768				3750	8270	30	19	154 A6	2.60	38

DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



IRRIGATION

FEATURES

- Designed for Irrigation usage which protect crops and minimize soil damage.
- Tread designed for excellent traction and self-cleaning.



1900



1450



1351



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
24"	Irr	11.2-24	1450	6	TT/TL	W 10	1090	42.9	284	11.2	3205	509	29	37	18	1060	2340	30	19	110 A6	1.80	26
24"	Irr	11.2-24	1450	8	TT/TL	W 10	1090	42.9	284	11.2	3205	509	29	37	18	1250	2756	30	19	116 A6	2.40	35
24"	Irr ND	11.2-24	1351	6	TT/TL	W 10	1090	42.9	284	11.2	3205	509	24	30	18	1060	2340	30	19	110 A6	1.80	26
24"	Irr ND	11.2-24	1351	8	TT/TL	W 10	1090	42.9	284	11.2	3205	509	24	30	18	1250	2760	30	19	116 A6	2.40	35
24"	Irr FullLug	11.2-24	1900	6	TT/TL	W 10	1090	42.9	280	11.0	3205	509	25	32	18	1060	2340	30	19	110 A6	1.80	26
24"	Irr FullLug	11.2-24	1900	8	TT/TL	W 10	1090	42.9	280	11.0	3205	509	25	32	18	1250	2760	30	19	116 A6	2.40	35
24"	Irr ND	14.9-24	1351	6	TT/TL	W 13	1245	49.0	378	14.9	3658	584	26	33	19	1550	3420	30	19	123 A6	1.40	20
24"	Irr ND	14.9-24	1351	8	TT/TL	W 13	1245	49.0	378	14.9	3658	584	26	33	19	1800	3970	30	19	128 A6	1.80	26
24"	Irr FullLug	14.9-24	1900	6	TT/TL	W 13	1245	49.0	375	14.8	3660	575	27	34	17	1550	3420	30	19	123 A6	1.40	20
24"	Irr FullLug	14.9-24	1900	8	TT/TL	W 13	1245	49.0	375	14.8	3660	575	27	34	17	1800	3970	30	19	128 A6	1.80	26
24"	Irr FullLug	16.9-24	1900	8	TT/TL	W 15L	1335	52.6	429	16.9	3950	615	26	33	17	2060	4542	30	19	133 A6	1.70	25
24"	Irr FullLug	16.9-24	1900	10	TT/TL	W 15L	1335	52.6	429	16.9	3950	615	26	33	17	2240	4940	30	19	136 A6	2.00	29
38"	Irr	11.2-38	1450	6	TT/TL	W 10	1445	56.9	284	11.2	4242	680	29	37	24	1285	2830	30	19	117 A6	1.80	26
38"	Irr	11.2-38	1450	8	TT/TL	W 10	1445	56.9	284	11.2	4242	680	29	37	24	1500	3310	30	19	122 A6	2.30	33
38"	Irr ND	11.2-38	1351	6	TT/TL	W 10	1445	56.9	284	11.2	4242	686	24	30	23	1285	2830	30	19	117 A6	1.80	26
38"	Irr ND	11.2-38	1351	8	TT/TL	W 10	1445	56.9	284	11.2	4242	686	24	30	23	1500	3310	30	19	122 A6	2.30	33
38"	Irr FullLug	11.2-38	1900	6	TT/TL	W 10	1445	56.9	284	11.2	4242	686	26	33	22	1285	2830	30	19	117 A6	1.80	26
38"	Irr FullLug	11.2-38	1900	8	TT/TL	W 10	1445	56.9	284	11.2	4242	686	26	33	22	1500	3310	30	19	122 A6	2.30	33

DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



IRRIGATION

FEATURES

- Designed for Irrigation usage which protect crops and minimize soil damage.
- Tread designed for excellent traction and self-cleaning.



1342



1198

Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
24"	Irri	14.9-24	1342	6	TT/TL	W 13	1240	48.8	375	14.8	3660	575	29	37	17	1550	3420	30	19	123 A6	1.40	20
24"	Irri	14.9-24	1342	8	TT/TL	W 13	1240	48.8	375	14.8	3660	575	29	37	17	1800	3970	30	19	128 A6	1.80	26
24"	Irri Diamond	14.9-24	1198	6	TT/TL	W 13	1255	49.4	405	15.9	3639	563	22	28	-	1550	3420	30	19	123 A6	1.40	20
24"	Irri Diamond	14.9-24	1198	8	TT/TL	W 13	1255	49.4	405	15.9	3639	563	22	28	-	1800	3970	30	19	128 A6	1.80	26
24"	Irri Diamond	14.9-24	1198	10	TT/TL	W 13	1255	49.4	405	15.9	3639	563	22	28	-	2060	4540	30	19	133 A6	2.20	32

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



R2 & AS

FEATURES

- The tread profile along with the larger contact area results in extraordinary stability.
- Highly resistance against wears and cuts.



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	Mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
24"	R1 HD	14.9-24	1504	12	TT/TL	W 13	1265	49.8	378	14.9	3837	576	40	51	18	2000	4400	40	25	132 A8	2.60	38
24"	R1 HD	14.9-24	1504	16	TT/TL	W 13	1265	49.8	378	14.9	3837	576	40	51	18	2400	5290	40	25	139 A8	3.50	51
24"	R1 HD	15.5/80-24	1504	12	TT/TL	W13 / W14L	1260	49.6	385	15.2	3655	566	40	51	18	2610	5750	40	25	154 A8	3.00	44
24"	R1 HD	15.5/80-24	1504	16	TT/TL	W13 / W14L	1260	49.6	385	15.2	3655	566	40	51	18	3110	6850	40	25	159 A8	4.00	58
34"	R2	18.4-34	1963	8	TT/TL	DW 16 A	1680	66.1	460	18.1	5029	771	51	65	16	2725	6000	40	25	143 A8	1.80	26
34"	R2	18.4-34	1963	12	TT/TL	DW 16 A	1680	66.1	460	18.1	5029	771	51	65	16	3000	6600	40	25	146 A8	2.20	32
34"	R2	18.4-34	1963	14	TT/TL	DW 16 A	1680	66.1	460	18.1	5029	771	51	65	16	3150	6940	40	25	148 A8	2.60	38
24"	R2	11.2-24	1963	12	TT/TL	Under development																
24"	R2	12.4-24	1963	12	TT/TL																	
24"	R2	14.9-24	1963	12	TT/TL																	
30"	R2	18.4-30	1963	12	TT/TL																	
38"	R2	18.4-38	1963	14	TT/TL																	

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



F2 Tractor Front

FEATURES

- Tractor Front tires appropriate to use on field & short distance road operations.
- Strong nylon carcass & rubber compound designed to resist wear & damage.
- Excellent load distribution & steering control for smooth working on soil.
- Raised central rib for easy steering & resist to side slip.



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
12"	F2 3-Rib	4.00-12	3340	4	TT	3.0 D	530	20.9	110	4.3	1573	255	11	14	...	200	440	40	25	60 A6	3.40	49
12"	F2 3-Rib	4.00-12	3340	6	TT	3.0 D	530	20.9	110	4.3	1573	255	11	14	...	250	550	40	25	52 A8	4.10	59
15"	F2 3-Rib	4.00-15	3340	4	TT	3.0	610	24.0	110	4.3	1854	295	12	15	...	265	580	40	25	60 A8	3.60	52
15"	F2 3-Rib	4.00-15	3340	6	TT	3.0	610	24.0	110	4.3	1854	295	12	15	...	307	680	40	25	67 A8	4.10	59
15"	F2 3-Rib	5.00-15	3340	6	TT	4.0 E	655	25.8	140	5.5	1951	307	12	15	...	400	880	40	25	76 A8	4.15	60
15"	F2 3-Rib	5.00-15	3340	8	TT	4.0 E	655	25.8	140	5.5	1951	307	12	15	...	475	1050	40	25	82 A8	5.50	80
15"	F2 3-Rib	7.5L-15	3340	6	TT	6.0	745	29.3	200	7.9	2212	342	17	22	...	650	1430	40	25	93 A8	3.00	44
15"	F2 3-Rib	7.5L-15	3340	8	TT	6.0	745	29.3	200	7.9	2212	342	17	22	...	825	1820	40	25	101 A8	3.60	52
15"	F2 3-Rib	9.5L-15	3340	8	TT	7.0	780	30.7	240	9.4	2330	359	17	22	...	850	1870	40	25	102 A8	3.30	48
15"	F2 3-Rib	9.5L-15	3340	10	TT	7.0	780	30.7	240	9.4	2330	359	17	22	...	950	2090	40	25	106 A8	4.00	58
15"	F2 3-Rib	11L-15	3340	8	TT	8.0 LB	815	32.1	279	11.0	2440	373	17	22	...	950	2090	40	25	106 A8	3.00	44
15"	F2 3-Rib	11L-15	3340	10	TT	8.0 LB	815	32.1	279	11.0	2440	373	17	22	...	1060	2340	40	25	110 A8	3.60	52
16"	F2 3-Rib	5.50-16	3340	6	TT	4.0 E	700	27.6	150	5.9	2116	332	12	15	...	475	1050	40	25	82 A8	3.80	55
16"	F2 3-Rib	5.50-16	3340	8	TT	4.0 E	700	27.6	150	5.9	2116	332	12	15	...	545	1200	40	25	87 A8	4.50	65
16"	F2 3-Rib	6.00-16	3340	6	TT	4.5 E	735	28.9	165	6.5	2190	346	13	16	...	515	1140	40	25	85 A8	3.60	52
16"	F2 3-Rib	6.00-16	3340	8	TT	4.5 E	735	28.9	165	6.5	2190	346	13	16	...	615	1350	40	25	91 A8	4.70	68
16"	F2 3-Rib	6.50-16	3340	6	TT	4.5 E	765	30.1	180	7.1	2280	359	13	16	...	560	1230	40	25	88 A8	3.30	48
16"	F2 3-Rib	6.50-16	3340	8	TT	4.5 E	765	30.1	180	7.1	2280	359	13	16	...	650	1430	40	25	93 A8	4.10	60
16"	F2 3-Rib	7.50-16	3340	8	TT	5.5 F	810	31.9	207	8.1	2414	379	15	19	...	775	1710	40	25	99 A8	3.85	56
16"	F2 3-Rib	7.50-16	3340	10	TT	5.5 F	810	31.9	207	8.1	2414	379	15	19	...	875	1930	40	25	103 A8	4.70	68
16"	F2 3-Rib	9.00-16	3340	8	TT	W 8	855	33.7	250	9.8	2548	398	15	19	...	950	2090	40	25	106 A8	3.30	48
16"	F2 3-Rib	9.00-16	3340	10	TT	W 8	855	33.7	250	9.8	2548	398	15	19	...	1090	2400	40	25	111 A8	4.15	60
16"	F2 3-Rib	10.00-16	3340	8	TT	W 8	890	35.0	275	10.8	2682	410	17	22	...	1060	2340	40	25	110 A8	3.00	44
16"	F2 3-Rib	10.00-16	3340	10	TT	W 8	890	35.0	275	10.8	2682	410	17	22	...	1215	2680	40	25	115 A8	3.80	55
16"	F2 3-Rib	10.00-16	3340	12	TT	W 8	890	35.0	275	10.8	2682	410	17	22	...	1320	2910	40	25	118 A8	4.50	65
16"	F2 3-Rib	11.00-16	3340	8	TT	W 10L	970	38.2	310	12.2	2890	448	23	29	...	1180	2600	40	25	114 A8	2.75	40
16"	F2 3-Rib	11.00-16	3340	10	TT	W 10L	970	38.2	310	12.2	2890	448	23	29	...	1360	3000	40	25	119 A8	3.50	51
16"	F2 3-Rib	11.00-16	3340	12	TT	W 10L	970	38.2	310	12.2	2890	448	23	29	...	1550	3420	40	25	123 A8	4.15	60
18"	F2 3-Rib	7.50-18	3340	6	TT	5.5 F	860	33.9	205	8.1	2562	404	15	19	...	730	1610	40	25	97 A8	3.00	44
18"	F2 3-Rib	7.50-18	3340	8	TT	5.5 F	860	33.9	205	8.1	2562	404	15	19	...	850	1870	40	25	102 A8	3.85	56
18"	F2 3-Rib	7.50-18	3340	10	TT	5.5 F	860	33.9	205	8.1	2562	404	15	19	...	975	2150	40	25	107 A8	4.70	68
19"	F2 3-Rib	4.00-19	3340	4	TT	3.0 D	715	28.1	115	4.5	2145	343	12	15	...	325	715	40	25	69 A8	3.60	52
19"	F2 3-Rib	4.00-19	3340	6	TT	3.0 D	715	28.1	115	4.5	2145	343	12	15	...	355	780	40	25	72 A8	4.20	61
19"	F2 3-Rib	6.00-19	3340	6	TT	4.5 E	815	32.1	165	6.5	2445	386	14	18	...	580	1280	40	25	89 A8	3.60	52
19"	F2 3-Rib	6.00-19	3340	8	TT	4.5 E	815	32.1	165	6.5	2445	386	14	18	...	600	1320	40	25	90 A8	3.90	56
20"	F2 3-Rib	7.50-20	3340	8	TT	5.5 F	915	36.0	205	8.1	2725	431	16	20	...	925	2040	40	25	105 A8	3.85	56
20"	F2 3-Rib	7.50-20	3340	10	TT	5.5 F	915	36.0	205	8.1	2725	431	16	20	...	1030	2270	40	25	109 A8	4.70	68

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



Tf Tractor Front (Notched Rib)

FEATURES

- Durable shoulders increase tire resistance to any kind of damage and protect the tire effectively.
- Keep the tread pattern free from the mud by special tread design.
- Raised central rib for easy steering & resist to side slip.
- Strong nylon carcass & rubber compound designed to resist wear & damage.



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
16"	Notched Rib	5.50-16	3745	6	TT	4.0 E	710	28.0	150	5.9	2116	331	12	15	...	475	1050	40	25	82 A8	3.85	56
16"	Notched Rib	5.50-16	3745	8	TT	4.0 E	710	28.0	150	5.9	2116	331	12	15	...	560	1230	40	25	88 A8	4.40	64
16"	Notched Rib	6.00-16	3880	8	TT	4.5 E	740	29.1	170	6.7	2205	345	17	22	...	615	1360	40	25	91 A8	4.70	68
16"	Notched Rib	6.00-16	3880	10	TT	4.5 E	740	29.1	170	6.7	2205	345	17	22	...	710	1560	40	25	96 A8	5.20	75
16"	Notched Rib	6.00-16	3160	8	TT	4.5 E	740	29.1	170	6.7	2205	345	15	19	...	615	1350	40	25	91 A8	4.70	68
16"	Notched Rib	6.00-16	3160	10	TT	4.5 E	740	29.1	170	6.7	2205	345	15	19	...	710	1560	40	25	96 A8	5.20	75
16"	Notched Rib	7.50-16	3160	8	TT	5.5 F	820	32.3	205	8.1	2445	383	18	23	...	775	1710	40	25	99 A8	3.85	56
16"	Notched Rib	7.50-16	3160	10	TT	5.5 F	820	32.3	205	8.1	2445	383	18	23	...	875	1930	40	25	103 A8	4.70	68
18"	Notched Rib	6.00-18	3160	8	TT	4.5 E	800	31.5	172	6.8	2410	374				710	1560	40	25	96 A8	3.30	48
20"	Notched Rib	6.50-20	3160	6	TT	5.0 F	860	33.9	180	7.1	2565	400	17	22	...	650	1430	40	25	93 A8	3.30	48
20"	Notched Rib	6.50-20	3160	8	TT	5.0 F	860	33.9	180	7.1	2565	400	17	22	...	800	1760	40	25	100 A8	4.10	60
20"	Notched Rib	7.50-20	3160	8	TT	5.5 F	915	36.0	205	8.1	2725	431	17	22	...	925	2040	40	25	105 A8	3.85	56
20"	Notched Rib	7.50-20	3160	10	TT	5.5 F	915	36.0	205	8.1	2725	431	17	22	...	1030	2270	40	25	109 A8	4.70	68

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



F2M Tractor Front

FEATURES

- Field-oriented tire for 2WD tractors in soil tillage applications.
- It gives high flotation capability contributing to minimize soil compaction.



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	Mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
15"	F2M 4-Rib	9.5L-15	3934	8	TL	7.0	780	30.7	240	9.4	2325	364	16	20	...	850	1870	40	25	102 A8	3.30	48
15"	F2M 4-Rib	9.5L-15	3934	12	TL	7.0	780	30.7	240	9.4	2325	364	16	20	...	1150	2530	40	25	113 A8	4.15	60
15"	F2M 4-Rib	11L-15	3934	8	TL	8 LB	795	31.3	280	11.0	2370	370	16	20	...	950	2094	40	25	106 A8	3.00	44
15"	F2M 4-Rib	11L-15	3934	10	TL	8 LB	795	31.3	280	11.0	2370	370	16	20	...	1060	2340	40	25	110 A8	3.60	52
16"	F2M 4-Rib	10.00-16	3934	8	TL	8 LB	880	34.6	280	11.0	2620	409	17	22	...	1060	2340	40	25	110 A8	3.00	44
16"	F2M 4-Rib	10.00-16	3934	10	TL	8 LB	880	34.6	280	11.0	2620	409	17	22	...	1250	2760	40	25	116 A8	3.60	52
16"	F2M 4-Rib	10.00-16	3934	12	TL	8 LB	880	34.6	280	11.0	2620	409	17	22	...	1400	3090	40	25	120 A8	4.15	60
16"	F2M 4-Rib	11.00-16	3934	8	TL	10 LB	960	37.8	320	12.6	2830	440	17	22	...	1180	2600	40	25	114 A8	2.80	41
16"	F2M 4-Rib	11.00-16	3934	10	TL	10 LB	960	37.8	320	12.6	2830	440	17	22	...	1360	3000	40	25	119 A8	3.45	50
16"	F2M 4-Rib	11.00-16	3934	12	TL	10 LB	960	37.8	320	12.6	2830	440	17	22	...	1550	3420	40	25	123 A8	4.15	60
16.1"	F2M 4-Rib	14L-16.1	3934	8	TL	W 11 C	975	38.4	355	14.0	2920	453	19	24	...	1360	3000	40	25	119 A8	2.50	36
16.1"	F2M 4-Rib	14L-16.1	3934	10	TL	W 11 C	975	38.4	355	14.0	2920	453	19	24	...	1550	3420	40	25	123 A8	3.00	44
16.1"	F2M 4-Rib	14L-16.1	3934	12	TL	W 11 C	975	38.4	355	14.0	2920	453	19	24	...	1750	3860	40	25	127 A8	3.60	52
16.1"	F2M 4-Rib	14L-16.1	3934	14	TL	W 11 C	975	38.4	355	14.0	2920	453	19	24	...	1850	4080	40	25	129 A8	4.15	60
16.1"	F2M 4-Rib	16.5L-16.1	3934	8	TL	W 14 C	1024	40.3	415	16.3	3000	444	26	33	...	1600	3520	40	25	124 A8	2.20	32
16.1"	F2M 4-Rib	16.5L-16.1	3934	10	TL	W 14 C	1024	40.3	415	16.3	3000	444	26	33	...	1850	4080	40	25	129 A8	2.75	40
16.1"	F2M 4-Rib	16.5L-16.1	3934	12	TL	W 14 C	1024	40.3	415	16.3	3000	444	26	33	...	2060	4542	40	25	133 A8	3.30	48
16.1"	F2M 4-Rib	16.5L-16.1	3934	14	TL	W 14 C	1024	40.3	415	16.3	3000	444	26	33	...	2240	4930	40	25	136 A8	3.85	56
16.1"	F2M 4-Rib	16.5L-16.1	3934	16	TL	W 14 C	1024	40.3	415	16.3	3000	444	26	33	...	2360	5200	40	25	138 A8	4.40	64

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



AW Farm Implement

FEATURES

- A low section implement & trailer tires, offering high load capacity with minimum soil compaction.
- Tires specially designed for modern farming, and suitable for general purpose applications.
- The low rolling resistance ensures significant savings in fuel consumption.



Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
12"	AW Imp	7.00-12	4483	6	TL	4.25	665	26.2	185	7.3	1948	295	6.5	8	...	690	1521	40	25	95 A8	2.50	36
12"	AW Imp	7.00-12	4483	8	TL	4.25	665	26.2	185	7.3	1948	295	6.5	8	...	825	1820	40	25	101 A8	3.10	45
12"	AW Imp	10.0/80-12	4483	8	TL	9.0	700	27.6	264	10.4	2080	312	6.5	8	...	1250	2755	40	25	116 A8	3.10	45
12"	AW Imp	10.0/80-12	4483	10	TL	9.0	700	27.6	264	10.4	2080	312	6.5	8	...	1450	3195	40	25	121 A8	3.90	56
12"	AW Imp	10.0/80-12	4483	12	TL	9.0	700	27.6	264	10.4	2080	312	6.5	8	...	1650	3640	40	25	125 A8	4.70	68
15.3"	AW Imp	10.0/75-15.3	4483	8	TL	9.0	760	29.9	264	10.4	2227	343	7	9	...	1360	3000	40	25	119 A8	3.10	45
15.3"	AW Imp	10.0/75-15.3	4483	10	TL	9.0	760	29.9	264	10.4	2227	343	7	9	...	1550	3420	40	25	123 A8	3.90	57
15.3"	AW Imp	10.0/75-15.3	4483	12	TL	9.0	760	29.9	264	10.4	2227	343	7	9	...	1700	3750	40	25	126 A8	4.70	68

Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
15.3"	AW Imp	10.0/75-15.3	4483	14	TL	9.0	760	29.9	264	10.4	2227	343	7	9	...	1900	4190	40	25	130 A8	5.50	80
15.3"	AW Imp	10.0/75-15.3	4483	18	TL	9.0	760	29.9	264	10.4	2227	343	7	9	...	2180	4800	40	25	135 A8	7.10	103
15.3"	AW Imp	10.0/75-15.3	4483	22	TL	9.0	760	29.9	264	10.4	2227	343	7	9	...	2300	5070	40	25	137 A8	7.10	103
15.3"	AW Imp	11.5/80-15.3	4483	10	TL	9.0	845	33.3	290	11.4	2473	370	7	9	...	1950	4300	40	25	131 A8	3.40	49
15.3"	AW Imp	11.5/80-15.3	4483	12	TL	9.0	845	33.3	290	11.4	2473	370	7	9	...	2180	4805	40	25	135 A8	4.10	59
15.3"	AW Imp	11.5/80-15.3	4483	14	TL	9.0	845	33.3	290	11.4	2473	370	7	9	...	2430	5360	40	25	139 A8	4.75	69
15.3"	AW Imp	11.5/80-15.3	4483	16	TL	9.0	845	33.3	290	11.4	2473	370	7	9	...	2575	5680	40	25	141 A8	5.40	78
15.3"	AW Imp	11.5/80-15.3	4483	18	TL	9.0	845	33.3	290	11.4	2473	370	7	9	...	2725	6000	40	25	143 A8	6.10	88
15.3"	AW Imp	11.5/80-15.3	4483	22	TL	9.0	845	33.3	290	11.4	2473	370	7	9	...	2800	6170	40	25	144 A8	6.10	88
15.3"	AW Imp	12.5/80-15.3	4483	14	TL	9.0	885	34.8	310	12.2	2591	387	7	9	...	2650	5840	40	25	142 A8	4.30	62
15.3"	AW Imp	12.5/80-15.3	4483	16	TL	9.0	885	34.8	310	12.2	2591	387	7	9	...	2800	6170	40	25	144 A8	4.90	71
15.3"	AW Imp	12.5/80-15.3	4483	18	TL	9.0	885	34.8	310	12.2	2591	387	7	9	...	3000	6610	40	25	146 A8	5.50	80
16"	AW Imp	10.5/65-16	4483	10	TL	W 9	755	29.7	274	10.8	2212	355	7	9	...	1550	3420	40	25	123 A8	3.80	55
16"	AW Imp	10.5/65-16	4483	14	TL	W 9	755	29.7	274	10.8	2212	355	7	9	...	1900	4190	40	25	130 A8	5.30	77
18"	AW Imp	13.0/65-18	4483	14	TL	11.0	890	35.0	330	13.0	2608	395	8	10	...	2575	5680	40	25	141 A8	4.30	62
18"	AW Imp	13.0/65-18	4483	16	TL	11.0	890	35.0	330	13.0	2608	395	8	10	...	2800	6173	40	25	144 A8	4.90	71
15.5	AW Imp	280/60-15.5	4483	14	TL	8.0	730	28.7	272	10.7	2140	324				1215	2680	40	25	115 A8	2.40	35
15.5"	AW Imp	400/60-15.5	4447	14	TL	AG 13	875	34.4	405	15.9	2564	380	8.5	11	...	2900	6390	40	25	145 A8	3.60	52
15.5"	AW Imp	400/60-15.5	4447	18	TL	AG 13	875	34.4	405	15.9	2564	380	8.5	11	...	3250	7160	40	25	149 A8	4.50	65
16"	AW Imp	7.50-16	4762	10	TL	5.5 F	790	31.1	214	8.4	2393	372	9	11	...	1120	2470	40	25	112 A8	4.80	70
16"	AW Imp	7.50-16	4762	12	TL	5.5 F	790	31.1	214	8.4	2393	372	9	11	...	1215	2680	40	25	115 A8	5.20	75
16"	AW Imp	360/70-16	4483	10	TL	11.0	910	35.8	357	14.0	2697	380				2300	5070	40	25	137 A8	2.40	35
16"	AW Imp	13.0/70-16	4483	10	TL	11.0	770	30.3	336	13.2	2261	356				2060	4540	40	25	133 A8	4.80	70
16"	AW Imp	13.0/70-16	4483	12	TL	11.0	770	30.3	336	13.2	2261	356				2240	4930	40	25	136 A8	5.70	83
16"	AW Imp	13.0/75-16	4483	10	TL	11.0	900	35.4	336	13.2	2726	396	8	10	...	2180	4800	40	25	135 A8	3.00	43
16"	AW Imp	14.0/65-16	4465	10	TL	11.0	870	34.3	353	13.9	2549	388	8	10	...	2120	4670	40	25	134 A8	2.80	41
16"	AW Imp	14.0/65-16	4465	14	TL	11.0	870	34.3	353	13.9	2549	388	8	10	...	2650	5840	40	25	142 A8	4.00	58
17"	AW Imp	15.0/55-17	4447	10	TL	13.0	850	33.5	391	15.4	2575	391	8	10	...	2120	4670	40	25	134 A8	2.60	52
17"	AW Imp	15.0/55-17	4447	12	TL	13.0	850	33.5	391	15.4	2575	391	8	10	...	2360	5200	40	25	138 A8	3.10	45
17"	AW Imp	15.0/55-17	4447	14	TL	13.0	850	33.5	391	15.4	2575	391	8	10	...	2575	5675	40	25	141 A8	3.70	54
17"	AW Imp	15.0/55-17	4447	18	TL	13.0	850	33.5	391	15.4	2575	391	8	10	...	3000	6610	40	25	146 A8	4.70	68
17"	AW Imp	19.0/45-17	4447	10	TL	16.0	866	34.1	491	19.3	2536	380				2360	5200	40	25	138 A8	2.25	33
17"	AW Imp	19.0/45-17	4447	14	TL	16.0	866	34.1	491	19.3	2536	380				2800	6170	40	25	144 A8	2.80	41
17"	AW Imp	19.0/45-17	4447	18	TL	16.0	866	34.1	491	19.3	2536	380				3150	6940	40	25	148 A8	3.30	48
17"	AW Imp	500/50-17	4447	14	TL	16.0	945	37.2	500	19.7	2750	416	8	10	...	3250	7160	40	25	149 A8	2.80	41
17"	AW Imp	500/50-17	4447	16	TL	16.0	945	37.2	500	19.7	2750	416	8	10	...	3550	7820	40	25	152 A8	3.20	46
17"	AW Imp	500/50-17	4447	18	TL	16.0	945	37.2	500	19.7	2750	416	8	10	...	3750	9090	40	25	154 A8	3.60	52
18"	AW Imp	340/70-18	4483	16	TL	11.0	902	35.5	342	13.4	2642	410				3650	8050	40	25	153 A8	4.90	71
18"	AW Imp	12.5/80-18	4483	12	TL	9.0	965	38	308	12.1	2827	432	8	10	...	2650	5840	40	25	142 A8	3.70	54
18"	AW Imp	12.5/80-18	4483	14	TL	9.0	965	38	308	12.1	2827	432	8	10	...	2900	6390	40	25	145 A8	4.30	62
18"	AW Imp	12.5/80-18	4483	16	TL	9.0	965	38	308	12.1	2827	432	8	10	...	3150	6940	40	25	148 A8	4.90	71
18"	AW Imp	12.5/80-18	4483	18	TL	9.0	965	38	308	12.1	2827	432	8	10	...	3350	7380	40	25	150 A8	5.50	80

DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



I-1 Rib Implement

FEATURES

- A low section implement & trailer tires, offering high load capacity with minimum soil compaction.
- High resistance against stubble punctures and cuts with its special tread compound.
- Wide tread design helps in high flotation capability.



Agriculture Tyres

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
14"	I1	6.40-14	4105	4	TL	4.5	684	26.9	163	6.4	2018	305				690	1520	50	31	95 B	3.30	48
14"	I1	7.50-14	4105	4	TL	5.5	686	27.0	194	7.7	2024	306				615	1360	50	31	91 B	1.90	28
14"	I1	8.5L-14	4105	6	TL	6.0	721	28.4	216	8.5	2127	322				850	1870	50	31	102 B	2.50	36
14"	I1	9.5L-14	4105	8	TL	7.0	730	28.7	235	9.3	2154	326	7	9	...	1090	2400	50	31	111 B	3.00	44
14"	I1	11L-14	4105	8	TL	8.0	730	28.7	235	9.3	2154	326	7	9	...	1120	2470	50	31	112 B	2.50	36
15"	I1	5.90-15	4105	4	TL	4.5	670	26.4	150	5.9	1955	295	9	11	...	515	1135	50	31	85 B	2.50	36
15"	I1	6.70L-15	4105	8	TL	4.5 KB	710	28.0	172	6.8	2080	319	7	9	...	850	1875	50	31	102 B	3.90	57
15"	I1	7.60L-15	4105	8	TL	5.5	734	28.9	193	7.6	2151	328	7	9	...	950	2090	50	31	106 B	3.60	52
15"	I1	9.5L-15	4105	8	TL	7.0	765	30.1	240	9.4	2242	340	7	9	...	1120	2469	50	31	112 B	3.00	44
15"	I1	10.00-15	4105	8	TL	8.0	853	33.6	274	10.8	2500	379				1450	3200	50	31	121 B	2.75	40
15"	I1	10.00-15	4105	12	TL	8.0	853	33.6	274	10.8	2500	379				1800	3960	50	31	128 B	3.85	56
15"	I1	11L-15	4105	8	TL	8 LB	770	30.3	270	10.6	2256	342	7	9	...	1150	2535	50	31	113 B	2.50	36
15"	I1	11L-15	4105	12	TL	8 LB	770	30.3	270	10.6	2256	342	7	9	...	1450	3197	50	31	121 B	3.60	52
15"	I1	12.5L-15	4105	8	TL	10 LB	810	31.9	310	12.2	2403	362	10	13	...	1550	3420	50	31	123 B	3.00	44
15"	I1	12.5L-15	4105	12	TL	10 LB	810	31.9	310	12.2	2403	362	10	13	...	1750	3860	50	31	127 B	3.60	52
16"	I1	6.00-16	4105	6	TL	4.0	712	28.0	159	6.3	2112	318				690	1520	50	31	95 B	3.00	44
16"	I1	6.50-16	4105	6	TL	4.5	735	28.9	173	6.8	2180	328				775	1710	50	31	99 B	3.00	44
16"	I1	7.00-16	4105	10	TL	5.5	760	29.9	180	7.1	2210	348	7	9	...	825	1819	50	31	101 B	2.80	41
16"	I1	7.00-16	4105	12	TL	5.5	760	29.9	180	7.1	2210	348	7	9	...	910	2010	50	31	104 B	3.00	43
16"	I1	7.50-16	4105	8	TL	5.5 F	785	30.9	205	8.1	2300	350	7	9	...	1060	2340	50	31	110 B	3.30	48
16"	I1	7.50-16	4105	12	TL	5.5 F	785	30.9	205	8.1	2300	350	7	9	...	1285	2830	50	31	117 B	4.50	65
16"	I1	9.00-16	4105	10	TL	6 LB	845	33.3	234	9.2	2476	374	7	9	...	1500	3300	50	31	122 B	3.60	52
16"	I1	9.00-16	4105	12	TL	6 LB	845	33.3	234	9.2	2476	374	7	9	...	1600	3530	50	31	124 B	4.00	58
16"	I1	11L-16	4105	10	TL	8 LB	795	31.3	270	10.6	2329	355	9	11	...	1360	3000	50	31	119 B	3.00	44
16"	I1	12.5L-16	4105	10	TL	10 LB	845	33.3	310	12.2	2476	374	10	13	...	1600	3525	50	31	124 B	3.00	44
16"	I1	12.5L-16	4105	12	TL	10 LB	845	33.3	310	12.2	2476	374	10	13	...	1800	3960	50	31	128 B	3.60	52
16.1"	I1	14L-16.1	4105	12	TL	W 11 C	935	36.8	360	14.2	2740	409	9	11	...	2120	4680	50	31	134 B	3.00	44
16.1"	I1	16.5L-16.1	4105	10	TL	W 14 C	1025	40.4	435	17.1	3003	444	10	13	...	2360	5200	50	31	138 B	2.50	36
16.1"	I1	16.5L-16.1	4105	12	TL	W 14 C	1025	40.4	435	17.1	3003	444	10	13	...	2575	5675	50	31	141 B	2.75	40
16.1"	I1	21.5L-16.1	4105	12	TL	W 18 CH	1130	44.5	550	21.7	3413	485	12	15	...	3250	7165	50	31	149 B	2.20	32
16.1"	I1	21.5L-16.1	4105	14	TL	W 18 CH	1130	44.5	550	21.7	3413	485	12	15	...	3550	7820	50	31	152 B	2.50	36
16.1"	I1	21.5L-16.1	4105	18	TL	W 18 CH	1130	44.5	550	21.7	3413	485	12	15	...	4000	8800	50	31	156 B	3.00	44
15"	I1	9.5L-15 Plus	4501	12	TL	7.0	765	30.1	240	9.4	2242	340	8	10	...	1450	3197	50	31	121 B	4.40	64
15"	I1	11L-15 Plus	4501	12	TL	8 LB	770	30.3	270	10.6	2256	342	8	10	...	1450	3200	50	31	121 B	3.60	52
15"	I1	12.5L-15 Plus	4501	12	TL	10 LB	810	31.9	310	12.2	2403	302	9	11	...	1750	3858	50	31	127 B	3.60	52
15"	I1/Baler	31x13.50-15	4501	10	TL	10 LB	782	30.8	351	13.8	2315	362	9	11	...	1400	3086	50	31	120 B	4.10	59
15"	I1/Baler	31x13.50-15	4501	12	TL	10 LB	782	30.8	351	13.8	2315	362	9	11	...	1600	3520	50	31	124 B	5.20	75

DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



FHS Farm Highway Services

FEATURES

- A low section implement & trailer tires, offering high load capacity with minimum soil compaction.
- Ideal tires for modern farming, suitable for both On & Off the road applications.
- For high speed application.





Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
15"	FHS	9.5L-15	4411	12	TL	7.0	765	30.1	245	9.6	2183	343	8	10		1550	3417	100	62	123 J	6.20	90
15"	FHS	11L-15	4411	12	TL	8 LB	775	30.5	279	11.0	2214	347	8	10		1800	3968	100	62	128 J	6.20	90
15"	FHS	12.5L-15	4411	12	TL	10 LB	815	32.1	315	12.4	2323	362	8	10		2120	4674	100	62	134 J	6.20	90

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



FLOATATION Implement

FEATURES

- Absorbs side impacts with its special superior sidewall mixture.
- Prevents the vehicle to slide to sides, "Thanks to the special compound & grips".



4222

Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
15.5"	FLO	400/60-15.5	4222	14	TL	AG 13.00	875	34.4	400	15.7	2561	380	21	27	21	2900	6390	40	25	145 A8	3.60	52
15.5"	FLO	400/60-15.5	4222	16	TL	AG 13.00	875	34.4	400	15.7	2561	380	21	27	21	3075	6780	40	25	147 A8	4.00	58
15.5"	FLO	400/60-15.5	4222	18	TL	AG 13.00	875	34.4	400	15.7	2561	380	21	27	21	3250	7160	40	25	149 A8	4.50	65
22.5"	FLO	500/60-22.5	4222	12	TL	AG 16.00	1170	46.1	500	19.7	3489	510	-	-	-	4125	9090	40	25	157A8	2.40	35
22.5"	FLO	500/60-22.5	4222	16	TL	AG 16.00	1170	46.1	500	19.7	3489	510	-	-	-	4875	10740	40	25	163 A8	3.20	46
22.5"	FLO	500/60-22.5	4222	18	TL	AG 16.00	1170	46.1	500	19.7	3489	510	-	-	-	5150	11350	40	25	165 A8	3.60	52
22.5"	FLO	600/50-22.5	4222	12	TL	AG 20.00	1170	46.1	600	23.6	3501	510	-	-	-	4375	9640	40	25	159 A8	2.00	29
22.5"	FLO	600/50-22.5	4222	16	TL	AG 20.00	1170	46.1	600	23.6	3501	510	-	-	-	5150	11350	40	25	165 A8	2.60	38
22.5"	FLO	600/50-22.5	4222	18	TL	AG 20.00	1170	46.1	600	23.6	3501	510	-	-	-	5450	12010	40	25	167 A8	2.90	42

DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com

TRAILER / TROLLEY

FEATURES

- A low section implement & trailer tires, offering high load capacity with minimum soil compaction.
- Ideal tires for modern farming, suitable for both On & Off the road applications.



Agriculture Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
							Inch	mm	Inch	mm			Inch	mm		mm	32nds	Kg	Lbs		Kmph	Mph
Tractor Rear/Drive Wheel (R-1)																						
16"	Semi-Lug	9.00-16	7255	12	TT	6.5	900	35.4	245	9.6	2685	406	22.0	28	...	1600	3530	40	25	124 A8	3.80	55
16"	Semi-Lug	9.00-16	7255	14	TT	6.5	900	35.4	245	9.6	2685	406	22.0	28	...	1750	3860	40	25	127 A8	4.40	64
16"	Semi-Lug	9.00-16	7255	16	TT	6.5	900	35.4	245	9.6	2685	406	22.0	28	...	1850	4080	40	25	129 A8	5.00	73
16"	Semi-Lug	9.00-16	7255	18	TT	6.5	900	35.4	245	9.6	2685	406	22.0	28	...	1950	4300	40	25	131 A8	5.60	81
16"	Semi-Lug	9.00-16	7525	12	TT	6.5 H	912	35.9	250	9.8	2681	410	18.0	23	46.0	1600	3530	40	25	124 A8	3.80	55
16"	Semi-Lug	9.00-16	7525	14	TT	6.5 H	912	35.9	250	9.8	2681	410	18.0	23	46.0	1750	3860	40	25	127 A8	4.40	64
16"	Semi-Lug	9.00-16	7525	16	TT	6.5 H	912	35.9	250	9.8	2681	410	18.0	23	46.0	1850	4080	40	25	129 A8	5.00	73
16"	Semi-Lug	9.00-16	7525	18	TT	6.5 H	912	35.9	250	9.8	2681	410	18.0	23	46.0	1950	4300	40	25	131 A8	5.60	81
20"	Rib	9.00-20	7228	16	TT	7.0	1019	40.1	259	10.2	2986	459	15.0	19	...	2715	5990	40	25	143 A8	7.25	105
20"	Semi-Lug	9.00-20	7336	16	TT	7.0	1025	40.4	260	10.2	3003	462	20.0	25	38.0	2715	5990	40	25	143 A8	7.25	105
20"	Rib	10.00-20	7228	16	TT	7.5	1054	41.5	274	10.8	3088	474	15.0	19	...	3050	6720	40	25	147 A8	8.00	116
20"	Semi-Lug	10.00-20	7336	16	TT	7.5	1054	41.5	274	10.8	3088	474	15.0	19	...	3050	6720	40	25	147 A8	8.00	116

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



Industrial Tires

We design specialized tires to satisfy our customers in every aspect of tire's performance







MPT Multi Purpose Tires

FEATURES

- Extra wide lugs with extensive overlap at the centre, gives resistance to buckling, tearing and cracking.
- MPT truck tires suitable for use on off-the-road and agricultural applications.
- Offers maximum flexibility for traction in all weather conditions, drive ability.



6040



6067



Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	32nds			Kg	Lbs	Kmph	Mph		Bar	Psi
15.3"	MPT	10.0/75-15.3	6067	12	TL	9.0	774	30.5	258	10.2	2310	355	19	24	18	1700	3740	40	25	126 A8	4.70	68
15.3"	MPT	10.0/75-15.3	6067	14	TL	9.0	774	30.5	258	10.2	2310	355	19	24	18	1900	4180	40	25	130 A8	5.50	80
15.3"	MPT	10.0/75-15.3	6067	16	TL	9.0	774	30.5	258	10.2	2310	355	19	24	18	2060	4540	40	25	133 A8	6.30	91
15.3"	MPT	11.5/80-15.3	6067	12	TL	9.0	868	34.2	292	11.5	2578	393	20	25	19	2180	4800	40	25	135 A8	4.00	58
15.3"	MPT	11.5/80-15.3	6067	14	TL	9.0	868	34.2	292	11.5	2578	393	20	25	19	2430	5350	40	25	139 A8	4.75	68
15.3"	MPT	11.5/80-15.3	6067	18	TL	9.0	868	34.2	292	11.5	2578	393	20	25	19	2725	6010	40	25	143 A8	6.00	87
18"	MPT	10.5-18	6067	10	TL	9.0	905	35.6	270	10.6	2700	415	17	22	21	1950	4300	40	25	131 A8	3.75	54
18"	MPT	10.5-18	6067	12	TL	9.0	905	35.6	270	10.6	2700	415	17	22	21	2180	4800	40	25	135 A8	4.50	65
18"	MPT R4	10.5/80-18	6040	10	TL	W 9	907	35.7	274	10.8	2617	405	22	28	16	1950	4300	40	25	131 A8	3.70	54
18"	MPT R4	10.5/80-18	6040	12	TL	W 9	907	35.7	274	10.8	2617	405	22	28	16	2180	4810	40	25	135 A8	4.90	71
18"	MPT	12.5-18	6067	10	TL	11.0	950	37.4	290	11.4	2940	450	17	22	21	2060	4540	40	25	133 A8	3.00	43
18"	MPT	12.5-18	6067	12	TL	11.0	950	37.4	290	11.4	2940	450	17	22	21	2240	4940	40	25	136 A8	3.50	51
18"	MPT	12.5-18	6067	14	TL	11.0	950	37.4	290	11.4	2940	450	17	22	21	2430	5350	40	25	139 A8	4.00	58
18"	MPT R4	12.5/80-18	6040	12	TL	W 9	980	38.6	308	12.1	2896	438	24	30	17	2650	5840	40	25	142 A8	3.70	54
18"	MPT R4	12.5/80-18	6040	14	TL	W 9	980	38.6	308	12.1	2896	438	24	30	17	2900	6390	40	25	145 A8	4.30	62
18"	MPT R4	12.5/80-18	6040	16	TL	W 9	980	38.6	308	12.1	2896	438	24	30	17	3150	6940	40	25	148 A8	4.90	71
18"	MPT R4	12.5/80-18	6040	18	TL	W 9	980	38.6	308	12.1	2896	438	24	30	17	3350	7380	40	25	150 A8	5.50	80
20"	MPT	12.5-20	6067	12	TL	11.0	1040	40.9	320	12.6	3090	475	17	22	22	2300	5070	40	25	137 A8	3.50	51
20"	MPT	12.5-20	6067	14	TL	11.0	1040	40.9	320	12.6	3090	475	17	22	22	2500	5510	40	25	140 A8	4.00	58
20"	MPT	12.5-20	6067	16	TL	11.0	1040	40.9	320	12.6	3090	475	17	22	22	2725	6000	40	25	143 A8	4.50	65
20"	MPT R4	12.5/80-20	6040	12	TL	11.0	1040	40.9	330	13.0	2896	438	24	30	17	2800	6173	40	25	144 A8	4.00	58
20"	MPT R4	12.5/80-20	6040	14	TL	11.0	1040	40.9	330	13.0	2896	438	24	30	17	3075	6780	40	25	147 A8	4.60	67
20"	MPT R4	12.5/80-20	6040	16	TL	11.0	1040	40.9	330	13.0	2896	438	24	30	17	3250	7160	40	25	149 A8	5.20	75
20"	MPT	16.0/70-20	6067	14	TL	13 SDC	1128	44.4	405	15.9	3350	490	23	29	20	3550	7830	40	25	152 A8	3.50	51
20"	MPT	16.0/70-20	6067	16	TL	13 SDC	1128	44.4	405	15.9	3350	490	23	29	20	3875	8540	40	25	155 A8	4.00	58
24"	MPT	16.0/70-24	6067	14	TL	13 5BL	1180	46.5	405	15.9	3460	546	22	28	22	3550	7830	40	25	152 A8	4.00	58
24"	MPT	16.0/70-24	6067	16	TL	13 5BL	1180	46.5	405	15.9	3460	546	22	28	22	3875	854	40	25	155 A8	4.50	65

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



F3 & R4 Industrial Tractor

FEATURES

- Its special designed tread with tough compound & strong carcass structure give superior durability on industrial & construction application.
- F3 truck tires suitable for use on off-the-road and agricultural applications.
- Offers maximum flexibility for traction in all weather conditions, drive ability.



4600



1324

Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
15"	F3	11L-15	4600	10	TL	8 LB	813	32.0	279	11.0	2384	366	16	20	...	1060	2330	40	25	110 A8	3.60	52
15"	F3	11L-15	4600	12	TL	8 LB	813	32.0	279	11.0	2384	366	16	20	...	1150	2310	40	25	113 A8	4.20	61
16"	F3	11L-16	4600	10	TL	W 8L	830	32.7	279	11.0	2438	374	16	20	...	1120	2470	40	25	112 A8	3.60	52
16"	F3	11L-16	4600	12	TL	W 8L	830	32.7	279	11.0	2438	374	16	20	...	1250	2750	40	25	116 A8	4.40	64
24"	R4	16.9-24	1324	10	TL	DW 15 L	1310	51.6	440	17.3	3850	590	28	35	14	2900	6400	40	25	145 A8	2.20	32
24"	R4	16.9-24	1324	12	TL	DW 15 L	1310	51.6	440	17.3	3850	590	28	35	14	3250	7150	40	25	149 A8	2.60	38
24"	R4	16.9-24	1324	16	TL	DW 15 L	1310	51.6	440	17.3	3850	590	28	35	14	3900	8600	40	25	155 A8	3.20	46
24"	R4	17.5L-24	1324	10	TL	DW 15 L	1270	50.0	440	17.3	3825	557	28	35	14	2800	6150	40	25	144 A8	2.20	32
24"	R4	17.5L-24	1324	12	TL	DW 15 L	1270	50.0	440	17.3	3825	557	28	35	14	3000	6600	40	25	146 A8	2.50	36
24"	R4	17.5L-24	1324	16	TL	DW 15 L	1270	50.0	440	17.3	3825	557	28	35	14	3600	7940	40	25	153 A8	3.10	45
24"	R4	19.5L-24	1324	12	TL	DW 16 L	1325	52.2	490	19.3	4031	585	28	35	15	3450	7600	40	25	151 A8	2.30	34
24"	R4	19.5L-24	1324	16	TL	DW 16 L	1325	52.2	490	19.3	4031	585	28	35	15	4125	9090	40	25	157 A8	2.90	42
24"	R4	18.4-24	1324	12	TL	DW 16 L	1375	54.1	472	18.6	4114	610	28	35	15	3875	8540	40	25	155 A8	2.50	36
24"	R4	18.4-24	1324	16	TL	DW 16 L	1375	54.1	472	18.6	4114	610	28	35	15	4650	10250	40	25	161 A8	3.10	45
26"	R4	18.4-26	1324	12	TL	DW 16 L	1425	56.1	472	18.6	4346	628	28	35	18	4000	8820	40	25	156 A8	2.50	36
26"	R4	18.4-26	1324	16	TL	DW 16 L	1425	56.1	472	18.6	4346	628	28	35	18	4600	10140	40	25	161 A8	2.90	42
28"	R4	16.9-28	1324	12	TL	DW 15 L	1410	55.5	440	17.3	4145	640	28	35	18	3450	7600	40	25	151 A8	2.60	38
28"	R4	16.9-28	1324	16	TL	DW 15 L	1410	55.5	440	17.3	4145	640	28	35	18	3960	8730	40	25	158 A8	3.00	43

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



G2/L2 Grader/Loader

FEATURES

- Rugged and sturdy tire for drive wheels, off the road equipment.
- Tough tread and carcass compounds combined with all-nylon cord with weather and ozone resistant properties make for a strong tire that withstands cuts, snags and bruises in most severe service conditions.



2350



2368



Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
							mm	Inch	mm	Inch			mm	mm		mm	32nds	Kg	Lbs		Kmph	Mph
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
24"	G2/L2	13.00-24	2350	12	TL	8.00 TG SDC	1278	50.3	333	13.1	3785	582	25	32	21	2725	6005	40	25	143 A8	3.00	44
24"	G2/L2	13.00-24	2350	14	TL	8.00 TG SDC	1278	50.3	333	13.1	3785	582	25	32	21	3000	6610	40	25	146 A8	3.50	51
24"	G2/L2	13.00-24	2350	16	TL	8.00 TG SDC	1278	50.3	333	13.1	3785	582	25	32	21	3350	7385	40	25	150 A8	4.00	58
24"	G2/L2	14.00-24	2350	12	TL	8.00 TG SDC	1348	53.1	362	14.3	3962	598	26	33	21	3075	6780	40	25	147 A8	2.75	40
24"	G2/L2	14.00-24	2350	14	TL	8.00 TG SDC	1348	53.1	362	14.3	3962	598	26	33	21	3450	7605	40	25	151 A8	3.00	44
24"	G2/L2	14.00-24	2350	16	TL	8.00 TG SDC	1348	53.1	362	14.3	3962	598	26	33	21	3650	8047	40	25	153 A8	3.70	54
25"	L2/G2	15.5-25	2368	12	TL	12.00/1.3	1270	50.0	380	15.0	3772	572	26	33	20	2650	5842	40	25	142 A8	2.25	33
25"	L2/G2	15.5-25	2368	16	TL	12.00/1.3	1270	50.0	380	15.0	3772	572	26	33	20	2900	6390	40	25	145 A8	2.75	40
25"	L2/G2	17.5-25	2368	16	TL	14.00/1.5	1320	52.0	440	17.3	3950	596	26	33	21	3350	7385	40	25	150 A8	2.75	40
25"	L2/G2	17.5-25	2368	20	TL	14.00/1.5	1320	52.0	440	17.3	3950	596	26	33	21	3650	8045	40	25	153 A8	3.25	47
25"	L2/G2	20.5-25	2368	16	TL	17.00/2.0	1492	58.7	520	20.5	4395	650	26	33	23	4000	8815	40	25	156 A8	2.25	33
25"	L2/G2	20.5-25	2368	20	TL	17.00/2.0	1492	58.7	520	20.5	4395	650	26	33	23	4500	9921	40	25	160 A8	2.75	40

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



SS Skid Steers

FEATURES

- Strong nylon cord & body structure provides high resistance to impacts & durability.
- Shows best traction along with self cleaning property.
- Featured with cut and chip resistance.



5131



5014

Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
							Inch	mm	Inch	mm			mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
Tractor Rear/Drive Wheel (R-1)							Inch	mm	Inch	mm	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
16.5"	SKID-L2/R4	10-16.5	5131	10	TL	8.25	770	30.3	263	10.4	2286	356	13	16	21	2120	4680	10	6	134 A2	5.20	75
16.5"	SKID-L2/R4	10-16.5	5131	12	TL	8.25	770	30.3	263	10.4	2286	356	13	16	21	2360	5200	10	6	138 A2	6.20	90
16.5"	SKID-L2/R4	12-16.5	5131	12	TL	9.75	840	33.1	314	12.4	2434	381	15	19	21	2900	6400	10	6	145 A2	5.50	80
16.5"	SKID-L2/R4	12-16.5	5131	14	TL	9.75	840	33.1	314	12.4	2434	381	15	19	21	3075	6800	10	6	147 A2	6.20	90
16.5"	SKID-ECO	10-16.5	5014	10	TL	8.25	770	30.3	263	10.4	2286	356	13	16	21	2120	4680	10	6	134 A2	5.20	75
16.5"	SKID-ECO	10-16.5	5014	12	TL	8.25	770	30.3	263	10.4	2286	356	13	16	21	2360	5200	10	6	138 A2	6.20	90
16.5"	SKID-ECO	12-16.5	5014	12	TL	9.75	830	32.7	315	12.4	2450	381	12	15	22	2900	6400	10	6	145 A2	5.20	75
16.5"	SKID-ECO	12-16.5	5014	14	TL	9.75	830	32.7	315	12.4	2450	381	12	15	22	3075	6800	10	6	147 A2	6.20	90
17.5"	SKID-L2/R4	14-17.5	5131	14	TL	10.50	920	36.2	350	13.8	2743	420	22	28	19	3875	8550	10	6	155 A2	5.50	80
19.5"	SKID-L2/R4	15-19.5	5131	14	TL	11.75	1035	40.7	400	15.7	3053	468	23	29	21	4625	10200	10	6	161 A2	4.80	70
19.5"	SKID-L2/R4	15-19.5	5131	16	TL	11.75	1035	40.7	400	15.7	3053	468	23	29	21	4875	10700	10	6	163 A2	5.50	80

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



SS Skid Steers / Grader (L4 & L5)

FEATURES

- Deep tread with wider blocks provides best traction & stability.
- Extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability.
- Suitable for heavy duty service.
- Best performance in its class.



5455



5554



Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
16.5"	SKID-ND L5	10-16.5	5554	10	TL	8.25	790	31.1	267	10.5	2285	356	33	42	---	2120	4680	10	6	134 A2	5.20	75
16.5"	SKID-ND L4	10-16.5	5455	12	TL	8.25	775	30.5	267	10.5	2285	356	36	46	20	2360	5200	10	6	138 A2	6.20	90
16.5"	SKID-ND L4	12-16.5	5455	12	TL	9.75	850	33.5	325	12.8	2514	391	34	43	21	2900	6400	10	6	145 A2	5.50	80
16.5"	SKID-ND L4	12-16.5	5455	14	TL	9.75	850	33.5	325	12.8	2514	391	34	43	21	3075	6800	10	6	147 A2	6.20	90
16.5"	SKID-ND L5	10-16.5	5554	10	TL	8.25	790	31.1	267	10.5	2285	356	33	42	---	2120	4680	10	6	134 A2	5.20	75
16.5"	SKID-ND L5	10-16.5	5554	12	TL	8.25	790	31.1	267	10.5	2285	356	33	42	---	2360	5200	10	6	138 A2	6.20	90
16.5"	SKID-ND L5	12-16.5	5554	12	TL	9.75	850	33.5	325	12.8	2514	391	34	43	---	2900	6400	10	6	145 A2	5.50	80
16.5"	SKID-ND L5	12-16.5	5554	14	TL	9.75	850	33.5	325	12.8	2514	391	34	43	---	3075	6800	10	6	147 A2	6.20	90
18"	ND L5	12.5/80-18	5554	12	TL	11.0	980	38.6	308	12.1	2896	438	33			2360	5200	40	25	138 A8	3.70	54
18"	ND L5	12.5/80-18	5554	14	TL	11.0	980	38.6	308	12.1	2896	438	33			2575	5680	40	25	141 A8	4.30	62
18"	ND L5	12.5/80-18	5554	16	TL	11.0	980	38.6	308	12.1	2896	438	33			2800	6170	40	25	144 A8	4.90	71
24"	ND L5	19.5L-24	5554	12	TL	DW 16L	1325	52.2	490	19.3	3835	584				3450	7600	40	25	151 A8	2.30	33
24"	ND L5	19.5L-24	5554	14	TL	DW 16L	1325	52.2	490	19.3	3835	584				3750	8270	40	25	154 A8	2.70	39
24"	ND L5	19.5L-24	5554	16	TL	DW 16L	1325	52.2	490	19.3	3835	584				4125	9090	40	25	157 A8	3.00	44

DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



FL Forklift

FEATURES

- Premium tire, designed for heavy duty service on forklift trucks, material handling & mining equipment.
- The deep tread, extra thick sidewalls & tough casing provide exceptional durability and minimize the risk of punctures & accidental damages.
- Specially designed rim guard ensures protection against flats & wheel damages in the rim flange area.





Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
8"	FKL	5.00-8	5491	10	TT	3.0 D	467	18.4	135	5.3	--	--	9	11	25	1090	2403	25	16	111 A5	10.00	145
9"	FKL	6.00-9	5491	10	TT	4.0 E	550	21.7	170	6.7	--	--	10	13	28	1320	2910	25	16	118 A5	8.50	123
10"	FKL	6.50-10	5491	10	TT	5.0 F	605	23.8	185	7.3	--	--	12	15	30	1500	3305	25	16	122 A5	7.75	112
10"	FKL	6.50-10	5491	12	TT	5.0 F	605	23.8	185	7.3	--	--	12	15	30	1650	3635	25	16	125 A5	9.00	130
12"	FKL	7.00-12	5491	12	TT	5.0 S	685	27.0	190	7.5	--	--	14	18	32	2060	4540	25	16	133 A5	8.00	116
12"	FKL	7.00-12	5491	14	TT	5.0 S	685	27.0	190	7.5	--	--	14	18	32	2120	4670	25	16	134 A5	9.00	131
12"	FKL	7.00-12	5491	16	TT	5.0 S	685	27.0	190	7.5	--	--	14	18	32	2240	4940	25	16	136 A5	10.00	145
13"	FKL	23 x 5	5491	10	TT	3.75 P	640	25.2	154	6.0	--	--	9	11		1450	3200	25	16	121 A5	8.00	116
15"	FKL	7.50-15	5491	14	TT	6.0 / 6.5	780	30.7	220	8.7	--	--	14	18	34	2800	6170	25	16	144 A5	9.30	135
15"	FKL	7.50-15	5491	16	TT	6.0 / 6.5	780	30.7	220	8.7	--	--	14	18	34	3000	6610	25	16	146 A5	10.00	145
15"	FKL	28x9-15 (8.15-15)	5491	14	TT	7.0	720	28.3	220	8.7	--	--	16	20	28	3000	6610	25	16	146 A5	10.00	145
15"	FKL	28x9-15 (8.15-15)	5491	16	TT	7.0	720	28.3	220	8.7	--	--	16	20	28	3210	7080	25	16	148 A5	10.35	150
15"	FKL	8.25-15	5491	14	TT	6.5	855	33.7	240	9.4	--	--	14	18	41	3250	7830	25	16	149 A5	8.00	116
15"	FKL	8.25-15	5491	16	TT	6.5	855	33.7	240	9.4	--	--	14	18	41	3550	2830	25	16	152 A5	9.25	134
15"	FKL	8.25-15	5491	18	TT	6.5	855	33.7	240	9.4	--	--	14	18	41	3650	8045	25	16	153 A5	10.00	145

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



E3/L3 Earthmover

FEATURES

- A wide, non-directional rock tread patterned design offers good resistance to impacts
- Strong carcass & superior tread compound offers good heat resistance.
- Special application mining tires uses premium compound to offer excellent in adverse condition and long haul operations.



Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
24"	E3/L3	13.00-24	2260	12	TL	8.00 TG SDC	1290	50.8	350	13.8	3872	601	23	29	32	5600	12346	10	6	168 A2	4.50	65
24"	E3/L3	13.00-24	2260	16	TL	8.00 TG SDC	1290	50.8	350	13.8	3872	601	23	29	32	6500	14330	10	6	173 A2	6.00	87
24"	E3/L3	13.00-24	2260	20	TL	8.00 TG SDC	1290	50.8	350	13.8	3872	601	23	29	32	7500	16530	10	6	178 A2	7.50	109
24"	E3/L3	13.00-24	2260	22	TL	8.00 TG SDC	1290	50.8	350	13.8	3872	601	23	29	32	8000	17640	10	6	180 A2	8.25	120
24"	E3/L3	14.00-24	2260	20	TL	10.00 W	1345	53.0	365	14.4	4050	620	24	30	34	8500	18739	10	6	182 A2	7.00	102
24"	E3/L3	14.00-24	2260	24	TL	10.00 W	1345	53.0	365	14.4	4050	620	24	30	34	9500	20940	10	6	186 A2	8.50	123
24"	E3/L3	14.00-24	2260	28	TL	10.00 W	1345	53.0	365	14.4	4050	620	24	30	34	10000	22045	10	6	188 A2	9.25	134
25"	E3/L3	14.00-25	2260	20	TL	10.00/1.5	1410	55.5	410	16.1	4105	620	25	32	34	8500	18739	10	6	182 A2	7.00	102
25"	E3/L3	14.00-25	2260	24	TL	10.00/1.5	1410	55.5	410	16.1	4105	620	25	32	34	9500	20940	10	6	186 A2	8.50	123
25"	E3/L3	14.00-25	2260	28	TL	10.00/1.5	1410	55.5	410	16.1	4105	620	25	32	34	10000	22045	10	6	188 A2	9.25	134
25"	E3/L3	17.5-25	2260	12	TL	14.00/1.5	1345	53.0	435	17.1	3980	622	24	30	34	6150	13555	10	6	171 A2	3.50	51
25"	E3/L3	17.5-25	2260	16	TL	14.00/1.5	1345	53.0	435	17.1	3980	622	24	30	34	7300	16094	10	6	177 A2	4.75	69
25"	E3/L3	17.5-25	2260	20	TL	14.00/1.5	1345	53.0	435	17.1	3980	622	24	30	34	8250	18185	10	6	181 A2	5.75	83
25"	E3/L3	20.5-25	2260	16	TL	17.00/2.0	1485	58.5	530	20.9	4395	682	25	32	38	8250	18185	10	6	181 A2	3.50	51
25"	E3/L3	20.5-25	2260	20	TL	17.00/2.0	1485	58.5	530	20.9	4395	682	25	32	38	9500	20940	10	6	186 A2	4.50	65
25"	E3/L3	20.5-25	2260	24	TL	17.00/2.0	1485	58.5	530	20.9	4395	682	25	32	38	10300	22705	10	6	189 A2	5.25	76
25"	E3/L3	20.5-25	2260	28	TL	17.00/2.0	1485	58.5	530	20.9	4395	682	25	32	38	11500	25350	10	6	193 A2	6.25	91
25"	E3/L3	23.5-25	2260	16	TL	19.5/2.5	1625	64.0	600	23.6	4810	742	26	33	40	9500	20940	10	6	186 A2	3.00	43
25"	E3/L3	23.5-25	2260	20	TL	19.5/2.5	1625	64.0	600	23.6	4810	742	26	33	40	10900	24030	10	6	191 A2	3.75	54
25"	E3/L3	23.5-25	2260	24	TL	19.5/2.5	1625	64.0	600	23.6	4810	742	26	33	40	12500	27555	10	6	196 A2	4.75	69
25"	E3/L3	23.5-25	2260	28	TL	19.5/2.5	1625	64.0	600	23.6	4810	742	26	33	40	13600	29980	10	6	199 A2	5.50	80

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



R3 Compactor

FEATURES

- High performance tire with strong nylon structure and reinforced bead design.
- Outstanding flotation capability.
- For heavy duty services and durability.





Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
26"	R3	18.4-26	1387	12	TL	DW 16L	1430	56.3	475	18.7	4140	635	22	28	---	3000	6610	30	19	146 A6	2.30	33
26"	R3	18.4-26	1387	16	TL	DW 16L	1430	56.3	475	18.7	4140	635	22	28	---	3550	7820	30	19	152 A6	2.90	42
26"	R3	23.1-26	1387	12	TL	DW 20B	1560	61.4	587	23.1	4545	686	28	35	---	3650	8040	30	19	153 A6	1.70	25
26"	R3	23.1-26	1387	16	TL	DW 20B	1560	61.4	587	23.1	4545	686	28	35	---	4375	9640	30	19	159 A6	2.30	33
26"	R3	23.1-26	1387	18	TL	DW 20B	1560	61.4	587	23.1	4545	686	28	35	---	4625	10200	30	19	161 A6	2.60	38

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



OTR NHS Truck

FEATURES

- Supportive tread design for off trucks carrying heavy loads in mining applications.
- Heavy Compound helps to minimize cuts and punctures.



7228



7336

Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
20"	Rib	9.00-20	7228	16	TT	7.0	1019	40.1	259	10.2	2986	459	15.0	19	...	2650	5840	100	62	142 J	7.95	115
20"	Semi-Lug	9.00-20	7336	16	TT	7.0	1025	40.4	260	10.2	3003	462	20.0	25	38.0	2650	5840	100	62	142 J	7.97	116
20"	Rib	10.00-20	7228	16	TT	7.5	1054	41.5	274	10.8	3088	474	15.0	19	...	3000	6610	100	62	146 J	7.95	115
20"	Rib	10.00-20	7228	18	TT	7.5	1054	41.5	274	10.8	3088	474	15.0	19	...	3075	6780	100	62	147 J	8.25	120
20"	Semi-Lug	10.00-20	7336	16	TT	7.5	1060	41.7	275	10.8	3106	477	21.0	27	39.0	3000	6610	100	62	146 J	5.00	73
20"	Semi-Lug	10.00-20	7336	18	TT	7.5	1060	41.7	275	10.8	3106	477	21.0	27	39.0	3075	6780	100	62	147 J	8.25	120
20"	Rib	11.00-20	7228	16	TT	8.0	1085	42.7	290	11.4	3212	499	16.0	20	...	3250	7160	100	62	149 J	7.95	115
20"	Rib	11.00-20	7228	18	TT	8.0	1085	42.7	290	11.4	3212	499	16.0	20	...	3350	7380	100	62	150 J	8.25	115
20"	Semi-Lug	11.00-20	7336	16	TT	8.0	1090	42.9	295	11.6	3227	501	21.0	27	40.0	3250	7165	100	62	149 J	7.95	115
20"	Semi-Lug	11.00-20	7336	18	TT	8.0	1090	42.9	295	11.6	3227	501	21.0	27	40.0	3350	7380	100	62	150 J	8.25	115
20"	Rib	12.00-20	7228	16	TT	8.5	1120	44.1	315	12.4	3282	504	13.0	16	...	3550	7830	100	62	152 J	7.25	105
20"	Rib	12.00-20	7228	18	TT	8.5	1120	44.1	315	12.4	3282	504	13.0	16	...	3750	8260	100	62	154 J	7.95	115

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com



MILITARY & LCV light commercial vehicle.

FEATURES

- Excellent design for on road & off road applications.
- Provides best traction & durability.
- Special compound provides excellent strength & impact resistance.
- Economical & best performing tire.



7129



7210



7444



7237

Industrial Tires

Bead Dia	Type	Size	Pattern	Ply Rating (PR)	TT/TL	Stand Rim	Overall Diameter (OD)		Section Width (SW)		R.C.	SLR	Tread Depth		No. of Lugs	Loading Capacity		Speed		Si/Li Index	Inflation Pressure	
Tractor Rear/Drive Wheel (R-1)						Inch	mm	Inch	mm	Inch	mm	mm	mm	32nds		Kg	Lbs	Kmph	Mph		Bar	Psi
16"	Military	7.00-16	7210	8	TT	5.50	780	30.7	195	7.7	2295	355	14	18	42	975	2150	90	56	107 G	3.80	55
16"	Military	7.00-16	7210	12	TT	5.50	780	30.7	195	7.7	2295	355	14	18	42	1285	2833	80	50	117 F	5.90	85
16"	Sand-cum-Highway	7.50-16	7129	8	TT	5.5F SDC	820	32.3	215	8.5	2471	378	13.0	16	...	1090	2403	65	40	111 D	4.30	62
16"	Sand-cum-Highway	7.50-16	7129	12	TT	5.5F SDC	820	32.3	215	8.5	2471	378	13.0	16	...	1360	3000	65	40	119 D	6.20	90
16"	Sand-cum-Highway	7.50-16	7129	14	TT	5.5F SDC	820	32.3	215	8.5	2471	378	13.0	16	...	1550	3420	65	40	123 D	7.60	110
16"	Rib	7.50-16	7444	12	TT	6.0 G	810	31.9	205	8.1	2383	366	13.0	16	...	1400	3090	100	62	120 J	6.20	90
16"	Rib	7.50-16	7444	14	TT	6.0 G	810	31.9	205	8.1	2383	366	13.0	16	...	1500	3310	100	62	122 J	6.90	100
16"	Rib	7.50-16	7444	16	TT	6.0 G	810	31.9	205	8.1	2383	366	13.0	16	...	1600	3530	100	62	124 J	7.60	110
16"	S. Lug	7.50-16	7237	16	TT	Under development																
16"	Rib	8.25-16	7444	14	TT																	
16"	S. Lug	8.25-16	7237	16	TT																	
16"	Semi-Lug	9.00-16	7255	14	TT	6.5	900	35.4	245	9.6	2685	406	22.0	28	...	1950	4300	90	56	131 G	6.20	90
16"	Semi-Lug	9.00-16	7255	16	TT	6.5	900	35.4	245	9.6	2685	406	22.0	28	...	2120	4670	90	56	134 G	7.25	105

DISCRPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com

Load Index Chart

LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg	LI	kg
0	45	40	140	80	450	120	1,400	160	4,500	200	14,000	240	45,000
1	46.2	41	145	81	462	121	1,450	161	4,625	201	14,500	241	46,250
2	47.5	42	150	82	475	122	1,500	162	4,750	202	15,000	242	47,500
3	48.7	43	155	83	487	123	1,550	163	4,875	203	15,500	243	48,750
4	50	44	160	84	500	124	1,600	164	5,000	204	16,000	244	50,000
5	51.5	45	165	85	515	125	1,650	165	5,150	205	16,500	245	51,500
6	53	46	170	86	530	126	1,700	166	5,300	206	17,000	246	53,000
7	54.5	47	175	87	545	127	1,750	167	5,450	207	17,500	247	54,500
8	56	48	180	88	560	128	1,800	168	5,600	208	18,000	248	56,000
9	58	49	185	89	580	129	1,850	169	5,800	209	18,500	249	58,000
10	60	50	190	90	600	130	1,900	170	6,000	210	19,000	250	60,000
11	61.5	51	195	91	615	131	1,950	171	6,150	211	19,500	251	61,500
12	63	52	200	92	630	132	2,000	172	6,300	212	20,000	252	63,000
13	65	53	206	93	650	133	2,060	173	6,500	213	20,600	253	65,000
14	67	54	212	94	670	134	2,120	174	6,700	214	21,200	254	67,000
15	69	55	218	95	690	135	2,180	175	6,900	215	21,800	255	69,000
16	71	56	224	96	710	136	2,240	176	7,100	216	22,400	256	71,000
17	73	57	230	97	730	137	2,300	177	7,300	217	23,000	257	73,000
18	75	58	236	98	750	138	2,360	178	7,500	218	23,600	258	75,000
19	77.5	59	243	99	775	139	2,430	179	7,750	219	24,300	259	77,500
20	80	60	250	100	800	140	2,500	180	8,000	220	25,000	260	80,000
21	82.5	61	257	101	825	141	2,575	181	8,250	221	25,750	261	82,500
22	85	62	265	102	850	142	2,650	182	8,500	222	26,500	262	85,000
23	87.5	63	272	103	875	143	2,725	183	8,750	223	27,250	263	87,500
24	90	64	280	104	900	144	2,800	184	9,000	224	28,000	264	90,000
25	92.5	65	290	105	925	145	2,900	185	9,250	225	29,000	265	92,500
26	95	66	300	106	950	146	3,000	186	9,500	226	30,000	266	95,000
27	97.5	67	307	107	975	147	3,075	187	9,750	227	30,750	267	97,500
28	100	68	315	108	1,000	148	3,150	188	10,000	228	31,500	268	1,00,000
29	103	69	325	109	1,030	149	3,250	189	10,300	229	32,500	269	1,03,000
30	106	70	335	110	1,060	150	3,350	190	10,600	230	33,500	270	1,06,000
31	109	71	345	111	1,090	151	3,450	191	10,900	231	34,500	271	1,09,000
32	112	72	355	112	1,120	152	3,550	192	11,200	232	35,500	272	1,12,000
33	115	73	365	113	1,150	153	3,650	193	11,500	233	36,500	273	1,15,000
34	118	74	375	114	1,180	154	3,750	194	11,800	234	37,500	274	1,18,000
35	121	75	387	115	1,215	155	3,875	195	12,150	235	38,750	275	1,21,500
36	125	76	400	116	1,250	156	4,000	196	12,500	236	40,000	276	1,25,000
37	128	77	412	117	1,285	157	4,125	197	12,850	237	41,250	277	1,28,500
38	132	78	425	118	1,320	158	4,250	198	13,200	238	42,500	278	1,32,000
39	136	79	437	119	1,360	159	4,375	199	13,600	239	43,750	279	1,36,000

SPEED SYMBOL	SPEED (Km/h)
A1	5
A2	10
A3	15
A4	20
A5	25
A6	30
A7	35
A8	40
B	50
C	60
D	65
E	70
F	80
G	90
J	100
K	110
L	120
M	130
N	140
P	150
Q	160
R	170
S	180
T	190
U	200
H	210
V	240
W	270
Y	300

RIGHT CHOICE FOR BETTER VALUE



DISCRIPTION

- All the figures are for reference; our company is not responsible for printing errors.
- Our company entitled to make any change on any information in this catalogue, without further notice.
- All sizes are available in custom ply ratings and TT / TL.

www.atftyre.com

Mounting and Unmounting Instructions

- Any mistake in replacement process may cause fatal results, and it must be done at authorized service points with appropriate machinery and by trained staff.
- The rim must be clean and undamaged. Never mount a tire to a cracked, smashed, deformed or repaired/welded rim. Any material which may harm the tire such as oil, rust or dirt must be cleaned. The rim size must be within the tolerance range, recommended by manufacturer of the vehicle.
- The tire must be dry and free of foreign material. In the mounting process, lubricant may be applied on the bead section of the tire. Chemical substances such as petroleum based oils, silicon or detergents must not be used as lubricant. Those products may cause tire to lose its special chemical properties.
- The tire inflation air must be moisture free. After mounting the tire, centering of the tire to the rim must be verified.
- The valves must be brand new and capped. In case the new tire is tube type, a flap must be placed between the tire and the tube. The flap must be powdered before the process.
- New tire must not be matched with old ones.
- In case rotation direction or outer side were stated on the sidewall, this information must be taken into consideration.

How to Inflate a Tire?

- Keep your distance for your safety.
- Use an inflation cage, mounted to the wall or ground, if there is.
- Do not exceed recommended inflation pressure.
- Use a moisture/dirt filter at the pressurized air line to prevent any moisture/dirt inside the tire.
- Do not exceed the recommended inflation pressure during the seating of the bead. In case they do not fit, abort the process.


Incorrect inflation pressure causes following results:

- Decreases the performance of the tire and provides an unsafe and uncomfortable drive Correct and stable inflation pressure increases the performance and life span of the tire Inflation pressure must be checked periodically.
- Low inflation pressure decreases the grip, reduces the life span of the tire by drive irregular wearing and even separations/cracking at the shoulders side walls. Over inflation pressure causes When the recommended inflation pressure was exceeded, the situation causes the rim to be damaged and vehicle to bounce: the durability against impacts decreases and jeopardises th life by busting
- The fuel consumption increases.
- Causes irregular corrosion on tread.

Storage

- Tire must be stored on special shelves and vertically. In case they are stored vertically one above the other, maximum 8 tire must be put, the tire must be switched each month, in case they remain in this status.
- In the tire storage area, there must not be any material which may create ozone effect -ch as oil, gasoline, solvent, car battery acid, acid installation system, sodium hydroxide, electrical engine or fluorescent light, even though the tire are already installed on the vehicle.
- The tire storage must be moisture free and must be ventilated regularly, not to cause moisture. There must not be any water in the area.
- In case there is no facility to store the tire on special shelves, their contact with the ground must be prevented and they must be stored one above the other, if they are mounted on rim or vertically, if not mounted on rim.

Comments

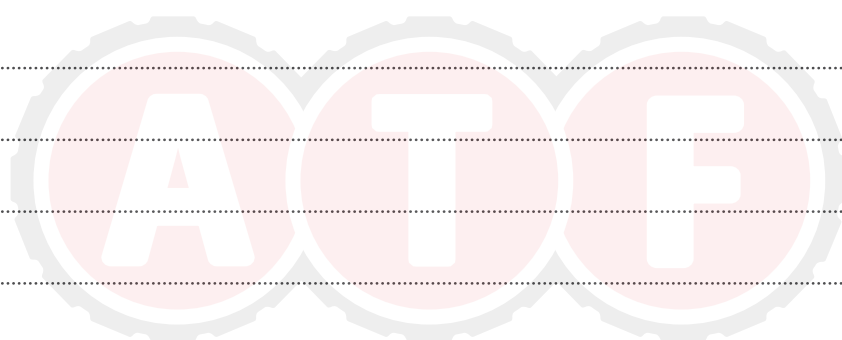



TYRES

ASIAN TIRE FACTORY LTD.

D-37, Focal Point, Jalandhar - 144004, Punjab, INDIA
Ph: +91-181-5083063 - 64 Fax: +91-181-2601531
Email: [exports\[at\]atftyre.com](mailto:exports[at]atftyre.com), [atf\[at\]atftyre.com](mailto:atf[at]atftyre.com)
Web: www.atftyre.com